



R-32 MULTI-POSITION, VARIABLE-SPEED, ECM-BASED AIR HANDLER WITH INTERNAL TXV COMFORTBRIDGE™ COMPATIBLE 1½ TO 5 TONS

Contents

Air Handler Nomenclature.....	2
Heater Kit Nomenclature.....	2
Product Specifications.....	3
Dimensions.....	4
Airflow Data.....	5
Heat Kit Data.....	6
Wiring Diagram.....	8
Accessories.....	9



R32

Product Features

- Internal factory-installed thermal expansion valves for cooling and heat pump applications
- Variable-speed ECM blower motor
- Compatible with Goodman smart thermostat and other Goodman communicating equipment
- Auto configuration of the airflow and tonnage in communicating mode
- All-aluminum evaporator coil
- Provides constant CFM over a wide range of static pressure conditions independent of duct system
- CFM indicator
- Fault recall of six most recent faults
- Provides adjustable low CFM for efficient fan-only operation
- Improved humidity and comfort control
- Built-in compatibility with multi-stage heat pump and cooling applications
- Factory installed R-32 sensor designed for the lifespan of the coil
- Optimized for the use with R-32 refrigerant
- UL 60335 2-40 Compliant
- AHRI certified; ETL listed
- Cabinet air leakage less than 2.0% at 1.0 inch H₂O when tested in accordance with ASHRAE standard 193
- Cabinet air leakage less than 1.4% at 0.5 inch H₂O when tested in accordance with ASHRAE standard 193
- 3 kW – 25 kW electric heater kits
- Horizontal or vertical configuration capabilities
- 21" depth for easier attic access
- DecaBDE-free thermoplastic drain pan with secondary drain connections
- Screw-less sides and back helps to reduce condensation when installed in humid locations
- Foil-faced insulation covers the internal casing to reduce cabinet condensation
- Galvanized, leather grain-embossed finish
- Glue-less cabinet insulation retention
- Tool-less filter access

10 YEAR PARTS LIMITED WARRANTY*



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV GL
= ISO 14001 =




* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in Florida, California, or Québec. The duration of warranty coverage in Texas and Florida differs in some cases. Other limitations and exclusions apply; refer to complete warranty details for a full list of limitations and exclusions.

	A	M	V	T	3,6	C	P	1	3	00	B	A	
	1	2	3	4	5,6	7	8	9	10	11,12	13	14	
BRAND													MINOR REVISION
A - CORPORATE AIR HANDLER D - DAIKIN AIR HANDLER													MAJOR REVISION
APPLICATION													FACTORY INSTALLED ELECTRIC HEAT KW
C - CEILING MOUNTED M - MULTI-POSITIONAL W - WALL MOUNTED F - FIT COMPATIBLE MULTI-POSITIONAL H - HORIZONTAL DISCHARGE COMPATIBLE MULTI-POSITIONAL													00 - NO ELECTRIC HEAT
MOTOR													REFRIGERANT
S - MS-ECM V - VS-ECM COMMUNICATING													3 - R32
EXPANSION DEVICE													ELECTRICAL
E - ELECTRONIC EXPANSION VALVE F - FLOWRATOR T - THERMAL EXPANSION VALVE													1 208/230 V, 1 PHASE, 60 Hz
NOMINAL CAPACITY													CABINET
12 - 1.0 TON 36 - 3.0 TONS 18 - 1.5 TONS 42 - 3.5 TONS 24 - 2.0 TONS 48 - 4.0 TONS 30 - 2.5 TONS 60 - 5.0 TONS													N - UNCASED P - PAINTED U - UNPAINTED
													CABINET WIDTH
													AC* Series AM* Series AW* Series M - 43.25" B - 17.5" S - 20.2" L - 49.25" C - 21.0" L - 24.0" D - 24.5"

	H	K	T	S	D	2	5	D	1	
	1	2	3	4	5	6	7	8	9	
Unit Type										Electrical A - Single phase 208 V B - Single phase 240 V 1 - Single phase 208/240 V 3 - Three phase 208/240 V
HKTS - Electric heater Kit for air handlers										
Service Disconnect										Cabinet Size X - All Cabinets C - C Cabinet D - D Cabinet
D - Service disconnect N - No service disconnect										
										Heating Capacity @ 240 V 3 3.0 kW 10 9.6 kW 5 4.8 kW 15 14.4 kW 6 6.0 kW 19 19.2 kW with 170°F limit 8 8.0 kW 20 19.2 kW with 160°F limit 25 24.0 kW
Note: 20X3 = 18.0 kW with 160°F limit										

	AMVT 24BP1300	AMVT 30BP1300	AMVT 36BP1300	AMVT 36CP1300	AMVT 42CP1300	AMVT 48CP1300	AMVT 60DP1300
NOMINAL RATINGS							
Cooling (Btu/h)	24,000	30,000	36,000	36,000	42,000	48,000	60,000
BLOWER							
Diameter	10"	10"	10"	10"	10"	10"	11"
Width	6"	6"	6"	8"	8"	10"	10"
REFRIGERANT LINE CONNECTION SIZE							
Liquid	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction	3/4"	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"
Coil Drain Connect FPT	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
ELECTRICAL DATA							
Voltage	208/240	208/240	208/240	208/240	208/240	208/240	208/240
Min Circuit Ampacity	4.9/4.9	4.9/4.9	6.5/6.5	6.5/6.5	6.5/6.5	6.5/6.5	8.6/8.6
Max. Overcurrent Device (amps)	15/15	15/15	15/15	15/15	15/15	15/15	15/15
Min. / Max VAC	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Blower Motor							
Blower Motor (FLA)	3.9	3.9	5.2	5.2	5.2	5.2	6.9
Blower Motor (HP)	1/2	1/2	3/4	3/4	3/4	3/4	1
SHIP WEIGHT (LBS)	117	134	134	158	158	158	172

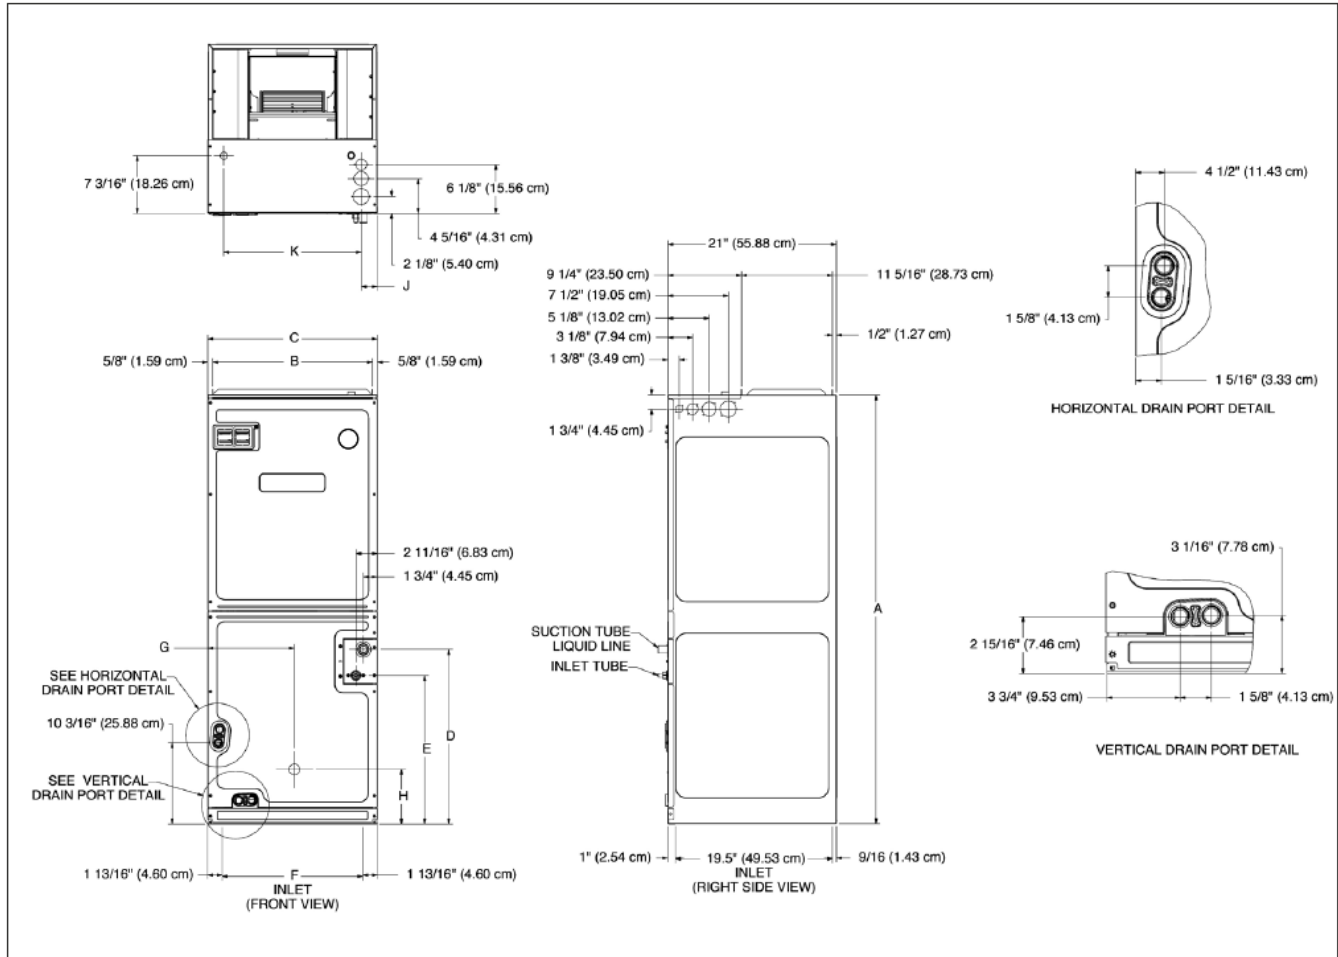

MODEL	A''	B''	C''	D''	E''	F''	G''	H''	J''	K''
AMVT24BP1300	45	16 ⁵ / ₁₆	17 ⁹ / ₁₆	15 ¹ / ₂	12	12 ¹ / ₂	9	12 ⁹ / ₁₆	2	13 ³ / ₈
AMVT30BP1300	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ¹ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMVT36BP1300	53 ⁷ / ₁₆	16 ⁵ / ₁₆	17 ⁹ / ₁₆	23 ¹¹ / ₁₆	20 ¹ / ₁₆	12 ¹ / ₂	9	12 ³ / ₄	2	13 ³ / ₈
AMVT36CP1300	49	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	17 ³ / ₄	16 ¹ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMVT42CP1300	53 ⁷ / ₁₆	19 ¹³ / ₁₆	21 ¹ / ₈	21 ¹² / ₁₆	18 ¹ / ₂	16 ¹ / ₁₆	9	12 ³ / ₄	2	17 ¹ / ₈
AMVT48CP1300	58	19 ¹³ / ₁₆	21 ¹ / ₈	26 ³ / ₁₆	22 ¹⁵ / ₁₆	14 ¹⁰ / ₁₆	10 ¹³ / ₁₆	6 ¹³ / ₁₆	2	17 ¹ / ₈
AMVT60DP1300	58	23 ¹ / ₁₄	24 ⁵ / ₈	26	22 ³ / ₄	17 ¹¹ / ₁₆	12 ⁹ / ₁₆	13 ¹³ / ₁₆	2	20 ⁵ / ₈

MODEL NUMBER	TONNAGE	LOW / HIGH	STATIC PRESSURE								
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
AMVT24BP1300	1.5	LOW	400	400	400	400	400	400	400	400	400
		HIGH	600	600	600	600	600	600	600	600	600
	2.0	LOW	535	535	535	535	535	535	535	535	535
		HIGH	800	800	800	800	800	800	800	800	800
AMVT30BP1300	1.5	LOW	400	400	400	400	400	400	400	400	400
		HIGH	600	600	600	600	600	600	600	600	600
	2.0	LOW	535	535	535	535	535	535	535	535	535
		HIGH	800	800	800	800	800	800	800	800	800
	2.5	LOW	670	670	670	670	670	670	670	670	670
		HIGH	1000	1000	1000	1000	1000	1000	1000	1000	1000
AMVT36BP1300	2.5	LOW	670	670	670	670	670	670	670	670	670
		HIGH	1000	1000	1000	1000	1000	1000	1000	1000	1000
	3.0	LOW	800	800	800	800	800	800	800	800	800
		HIGH	1200	1200	1200	1200	1200	1200	1200	1200	1200
AMVT36CP1300	2.0	LOW	535	535	535	535	535	535	535	535	535
		HIGH	800	800	800	800	800	800	800	800	800
	2.5	LOW	670	670	670	670	670	670	670	670	670
		HIGH	1000	1000	1000	1000	1000	1000	1000	1000	1000
	3.0	LOW	800	800	800	800	800	800	800	800	800
		HIGH	1200	1200	1200	1200	1200	1200	1200	1200	1200
AMVT42CP1300	3.0	LOW	800	800	800	800	800	800	800	800	800
		HIGH	1200	1200	1200	1200	1200	1200	1200	1200	1200
	3.5	LOW	940	940	940	940	940	940	940	940	940
		HIGH	1400	1400	1400	1400	1400	1400	1400	1400	1400
AMVT48CP1300	3.5	LOW	940	940	940	940	940	940	940	940	940
		HIGH	1400	1400	1400	1400	1400	1400	1400	1400	1400
	4.0	LOW	1070	1070	1070	1070	1070	1070	1070	1070	1070
		HIGH	1600	1600	1600	1600	1600	1600	1600	1600	1600
AMVT60DP1300	4.0	LOW	1070	1070	1070	1070	1070	1070	1070	1070	1070
		HIGH	1600	1600	1600	1600	1600	1600	1600	1600	1600
	5.0	LOW	1340	1340	1340	1340	1340	1340	1340	1340	1340
		HIGH	2000	2000	2000	2000	2000	2000	2000	2000	2000

NOTES

1. AIRFLOW DATA INDICATED IS AT 230V WITHOUT AIR FILTER IN PLACE.
2. THE CHART IS FOR INFORMATION ONLY. FOR SATISFACTORY OPERATION, EXTERNAL STATIC PRESSURE MUST NOT EXCEED VALUE SHOWN ON RATING PLATE.
3. USE THE CFM ADJUSTMENT FACTORS OF 0.98 FOR HORIZONTAL LEFT AND 0.96 FOR HORIZONTAL RIGHT & DOWNFLOW ORIENTATIONS
4. WHEN APPLYING A HUMIDISTAT (NORMALLY CLOSED), REFER TO THE INSTALLATION AND OPERATING INSTRUCTIONS. THE HUMIDISTAT CAN ADJUST THE COOLING AIRFLOW TO 85%

HEATER KIT MODEL	CIRCUIT 1 (208V/240V)			CIRCUIT 2 (208V/240V)			SINGLE-POINT KIT (208V/240V)	
	HEATER AMPS	MCA ¹	MOP ²	HEATER AMPS	MCA ¹	MOP ²	MCA ¹	MOP ²
AMVT24BP1300AA	0/0	4.9/4.9	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	18.4/20.5	20/25	---	---	---	---	---
HKTS*05X1	17.3/20.0	26.5/29.9	30/30	---	---	---	---	---
HKTSN06X1	21.7/25.0	32.0/36.1	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	41.0/46.5	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	48.2/54.9	50/60	---	---	---	---	---
HKTSD15XA/B	34.7/40.0	48.2/54.9	50/60	17.3/20	21.7/25	25/25	69.9/79.9	70/80
AMVT30BP1300AA	0/0	4.9/4.9	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	18.4/20.5	20/25	---	---	---	---	---
HKTS*05X1	17.3/20.0	26.5/29.9	30/30	---	---	---	---	---
HKTSN06X1	21.7/25.0	32.0/36.1	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	41.0/46.5	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	48.2/54.9	50/60	---	---	---	---	---
HKTSD15XA/B	34.7/40.0	48.2/54.9	50/60	17.3/20	21.7/25	25/25	69.9/79.9	70/80
AMVT36BP1300AA	0/0	6.5/6.5	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	20.0/22.1	25/25	---	---	---	---	---
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	---	---	---	---	---
HKTSD15XA/B	34.7/40.0	49.8/56.5	50/60	17.3/20	21.7/25	25/25	71.5/81.5	80/90
AMVT36CP1300AA	0/0	6.5/6.5	15/15	---	---	---	---	---
HKTSN03X1	10.8/12.5	20.0/22.1	20/25	---	---	---	---	---
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	---	---	---	---	---
HKTS*15X3 ^	0/0	6.5/6.5	15/15	30.0/34.6	37.5/43.3	40/45	---	---
HKTSD15XA/B	34.7/40.0	49.8/56.5	50/60	17.3/20	21.7/25	25/25	71.5/81.5	80/90
HKTSD19CA/B	34.7/40.0	49.8/56.5	50/60	34.7/40	43.3/50	45/50	93.2/107	100/110
AMVT42CP1300AA	0/0	6.5/6.5	15/15	---	---	---	---	---
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	---	---	---	---	---
HKTS*15X3 ^	0/0	6.5/6.5	15/15	30.0/34.6	37.5/43.3	40/45	---	---
HKTSD15XA/B	34.7/40.0	49.8/56.5	50/60	17.3/20	21.7/25	25/25	71.5/81.5	80/90
HKTSD19CA/B	34.7/40.0	49.8/56.5	50/60	34.7/40	43.3/50	45/50	93.2/107	100/110

HEATER KIT MODEL	CIRCUIT 1 (208V/240V)			CIRCUIT 2 (208V/240V)			SINGLE-POINT KIT (208V/240V)	
	HEATER AMPS	MCA ¹	MOP ²	HEATER AMPS	MCA ¹	MOP ²	MCA ¹	MOP ²
AMVT48CP1300AA	0/0	6.5/6.5	15/15	---	---	---	---	---
HKTS*05X1	17.3/20.0	28.2/31.5	30/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	33.6/37.8	35/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	42.6/48.2	45/50	---	---	---	---	---
HKTS*10X1	34.7/40.0	49.8/56.5	50/60	---	---	---	---	---
HKTS*15X3 ^	0/0	6.5/6.5	15/15	30.0/34.6	37.5/43.3	40/45	---	---
HKTSD15XA/B	34.7/40.0	49.8/56.5	50/60	17.3/20	21.7/25	25/25	71.5/81.5	80/90
HKTSD19CA/B	34.7/40.0	49.8/56.5	50/60	34.7/40	43.3/50	45/50	93.2/107	100/110
AMVT60DP1300AA	0/0	8.6/8.6	15/15	---	---	---	---	---
HKTS*05X1	17.3/20.0	30.3/33.6	35/35	---	---	---	---	---
HKTSN06X1	21.7/25.0	35.7/39.9	40/40	---	---	---	---	---
HKTS*08X1	28.9/33.3	44.7/50.3	45/60	---	---	---	---	---
HKTS*10X1	34.7/40.0	52.0/58.6	60/60	---	---	---	---	---
HKTS*15X3 ^	0/0	8.6/8.6	15/15	30.0/34.6	37.5/43.3	40/45	---	---
HKTSD15XA/B	34.7/40	52.0/58.6	60/60	17.3/20	21.7/25	25/25	73.6/83.6	80/90
HKTS*20X3 ^	0/0	8.6/8.6	15/15	37.5/43.3	46.9/54.1	50/60	---	---
HKTSD20DA/B	34.7/40	52.0/58.6	60/60	34.7/40.0	43.3/50.0	45/50	95.3/109	100/110
HKTSD25DA/B	34.7/40	52.0/58.6	60/60	52.0/60	65.0/75	45/50	117/134	125/150

¹ Minimum Circuit Ampacity (Heater Amps + Motor Amps) X 1.25


² Maximum Overcurrent Protection = 2.25 X Motor Amps + Heater Amps

^ Three-phase Heater Kits (Circuit 1: Single-phase for Air Handlers Circuit 2: Three-phase for Heater Kits)

* D - Service disconnect, N - No service disconnect

--- indicates Not Required

Note: The 208 or 240 in the heat kit part number field is for clarification of the nominal voltage for this model.

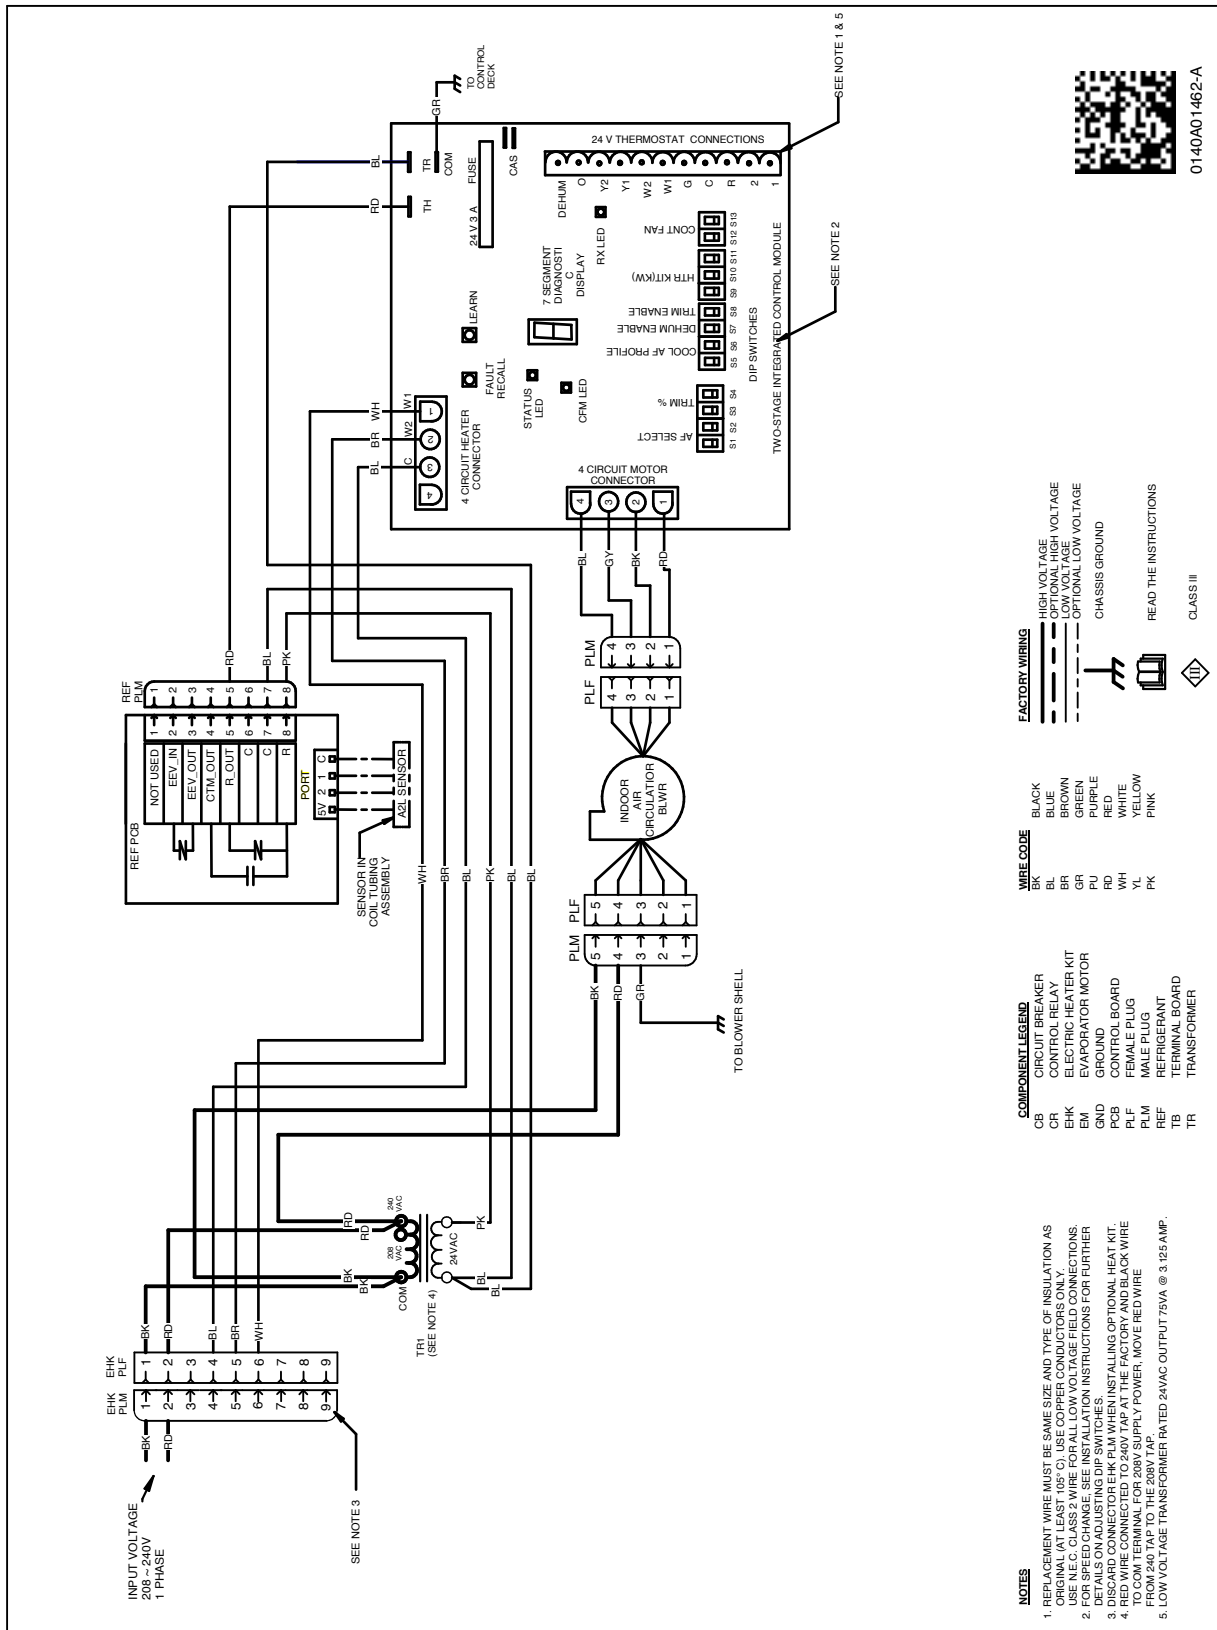

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

DOWNFLOW KITS

DFKE-02	DFKE-03
AMVT24BP1300**	AMVT48CP1300**
AMVT30BP1300**	AMVT60DP1300**
AMVT36BP1300**	
AMVT36CP1300**	
AMVT42CP1300**	

HIGH HUMIDITY KIT

HHK0004	HHK0005	HHK0007
AMVT24BP1300**	AMVT36CP1300**	AMVT60DP1300**
AMVT30BP1300**	AMVT42CP1300**	
AMVT36BP1300**	AMVT48CP1300**	

CONDENSATE MANAGEMENT KIT

CMK0018	CMK0019	CMK0020
AMVT24BP1300**	AMVT30BP1300**	AMVT48CP1300**
AMVT36CP1300**	AMVT36BP1300**	AMVT60DP1300**
	AMVT42CP1300**	

FILTERS

CHASSIS	PART #	SIZE
B	ALFH16201E	16.0" x 20.0"
C	ALFH1912201E	19.5" x 20.0"
D	ALFH20231E	23.0" x 20.0"

SINGLE POINT WIRING KIT (SPW-01)

HEATER KIT MODEL	SPWK-B	SPWK-C	SPWK-D
HKTSD15XA	AMVT24BP1300**	AMVT36CU1300** AMVT42CU1300** AMVT48CU1300**	AMVT60DU1300**
HKTSD15XB	AMVT30BP1300**		
	AMVT36BU1300**		
HKTSD19CA			
HKTSD19CB			
HKTSD20DA			AMVT60DU1300**
HKTSD20DB			
HKTSD25DA			AMVT60DU1300**
HKTSD25DB			

ULTRAVIOLET DRAIN PAN KIT

MODEL SIZE	KIT #	PARTS				
AMVT24B	UVPK01	DRAIN PAN MAIN	DRAIN PAN SIDE	NA	CONDENSATE COLLECTOR, BACK	CONDENSATE COLLECTOR, BACK
AMVT30B AMVT36B	UVPK02			CONDENSATE COLLECTOR, BACK		
AMVT36C	UVPK03					
AMVT42C	UVPK04					
AMVT48C	UVPK05					
AMVT60D	UVPK07					

R32 ZONING ACCESSORY KIT

KIT NUMBER	MODELS
0230K00007	All AMVT Models

[illegible]

[illegible]

[illegible]