

Jandy®

CRYSTAL CLEAR CLARITY

OFFICIAL POOL EQUIPMENT SUPPLIER

USA SWIMMING

CV/CL SERIES
CARTRIDGE FILTER


Jandy® CV & CL Cartridge Filters

The CV and CL Cartridge Filters set the benchmark in cartridge filtration. Loaded with user-friendly features, Jandy Cartridge Filters optimize surface area and help provide clean, sparkling water. They are constructed of durable and corrosion-resistant materials for maximum durability and are available in 340, 460 and 580 square foot models.




- **Additional Features**
  - CV Series Filters compatible with our exclusive, energy-efficient Versa Plumb® system
  - Sweep Elbow fittings included with CV Series filters for hydraulic efficiency
  - 2" x 2½" Universal Unions and easy-grip handles allow for hassle-free installation
  - Extra large 2" drain port allows for easy cleaning
  - Unique pressure gauge features clean/dirty indicator that can be customized, making it easy to assess filter cartridge condition
  - Heavy-duty, anti-corrosion tank clamp for long lasting performance

DIMENSIONS

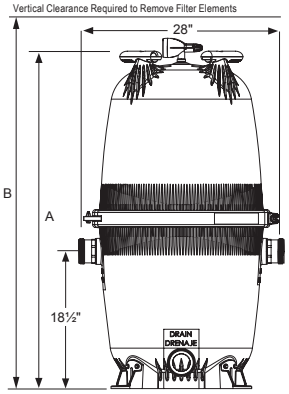


CV Filter

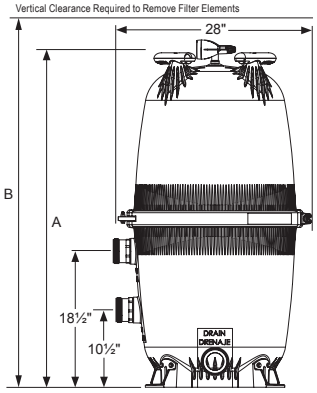

CL Filter

PERFORMANCE

CV/CL Filter Head Loss Curves

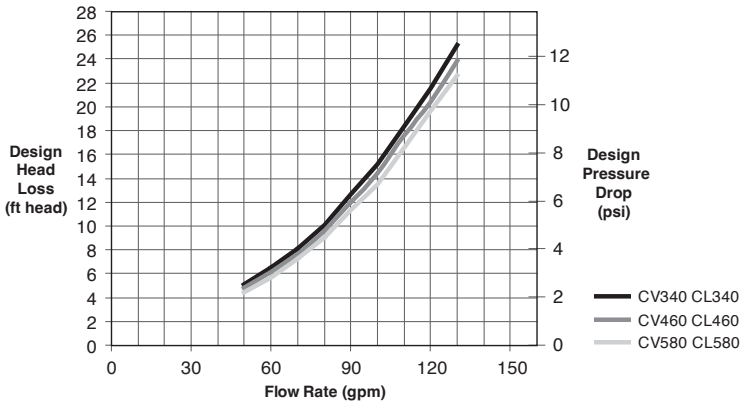

SPECIFICATIONS

Model Number	CV340	CV460	CV580	CL340	CL460	CL580
Filter Area	340 ft²	460 ft²	580 ft²	340 ft²	460 ft²	580 ft²
Design Flow Rate	.37 gpm/ft²	.33 gpm/ft²	.26 gpm/ft²	.37 gpm/ft²	.33 gpm/ft²	.26 gpm/ft²
Maximum Flow	127 gpm	150 gpm	150 gpm	127 gpm	150 gpm	150 gpm
Six Hour Capacity	45,720 gallons	54,000 gallons	54,000 gallons	45,720 gallons	54,000 gallons	54,000 gallons
Eight Hour Capacity	60,960 gallons	72,000 gallons	72,000 gallons	60,960 gallons	72,000 gallons	72,000 gallons
Maximum Working Pressure	50 psi	50 psi	50 psi	50 psi	50 psi	50 psi
Cartridges Required	4 (85 ft² each)	4 (115 ft² each)	4 (145 ft² each)	4 (85 ft² each)	4 (115 ft² each)	4 (145 ft² each)
Shipping Weight	106 lbs.	106 lbs.	112 lbs.	93 lbs.	95 lbs.	101 lbs.
Height "A"	41"	41"	47"	41"	41"	47"
Height "B"	57"	57"	69"	57"	57"	69"
Footprint	25" diameter circle	25" diameter circle	25" diameter circle	25" diameter circle	25" diameter circle	25" diameter circle
Distance Between Inlet and Outlet	Not Applicable	Not Applicable	Not Applicable	8"	8"	8"

TRADE SERIES EXCLUSIVE

NSF Certified to NSF/ANSI/CAN 50

94314_SL

©2025 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 94314_SL