Jandy®

POWER MEETS PERFORMANCE

OFFICIAL POOL EQUIPMENT SUPPLIER

USA SWIMMING®

STEALTH™
SINGLE-SPEED PUMPS

The Heart of Your Pool System

Stealth™ is a professional-grade pump that provides superior performance and energy-saving efficiency. Stealth is designed for ease of installation and trouble-free maintenance, and is our most efficient single-speed pump available.

- **High Performance**
  DOE compliant residential and commercial models available.
- **Low Maintenance**
  The largest smooth surface trap basket on the market for reduced maintenance.
- **User-Friendly**
  Includes ergonomic carry handle, tool-free lid and drain plugs.
- **Less Noise**
  "Quiet Technology" design for whisper-soft operation.
- **Easy to Install**
  Includes 2"x 2 1/2" unions
  (2 1/2"x 3"unions on 3HP & 5HP models.)
- **Commercial Applications**
  Single-Phase and Three-Phase models available for commercial applications. Models SHPF5.0TEFC and SHPF5.0-3PH feature a Totally Enclosed, Fan-Cooled (TEFC) motor design.

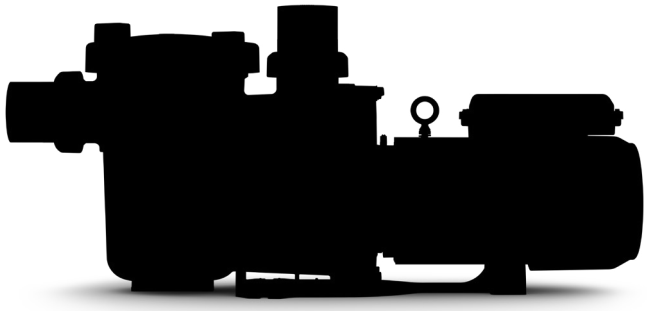

Models SHPF5.0TEFC & SHPF5.0-3PH feature a TEFC Motor. 3-Phase model SHPF5.0-3PH is variable-frequency drive (VFD) compatible.

SPECIFICATIONS

Residential Stealth Pumps

Model No.	THP	WEF[1]	Voltage	Amps	Rec. Pipe Size[2]	Carton Weight	Overall Length
SHPF.50 SHPM.75	0.95	3.6	208-230/115	4.5-4.4/8.8	2"-2½"	30 lbs.	29"

Commercial 1-Phase Stealth Pumps[3]

Model No.	THP	WEF[1]	Voltage	Amps	Rec. Pipe Size[2]	Carton Weight	Overall Length
SHPF5.0TEFC[4]	5.50	1.8	208-230	24.7-22.7	4"	97 lbs.	35"

Commercial 3-Phase Stealth Pumps[3]

Model No.	THP	WEF[1]	Voltage	Amps	Rec. Pipe Size[2]	Carton Weight	Overall Length
SHPF1.0-3PH	1.65	2.7	208-230/460	5.0–4.6/2.3	2"-2½"	55 lbs.	29¾"
SHPF1.5-3PH	2.21	2.6	208-230/460	6.4–5.8/2.9	2"-2½"	57 lbs.	30"
SHPF2.0-3PH	2.60	2.5	208-230/460	7.1– 6.8/3.4	2"-2½"	64 lbs.	30½"
SHPF3.0-3PH	3.45	2.1	208-230/460	9.0–8.6/4.3	3"	62 lbs.	31½"
SHPF5.0-3PH[4]	5.75	1.8	208-230/460	15.5-15.0/7.5	4"	95 lbs.	35"

DIMENSIONS

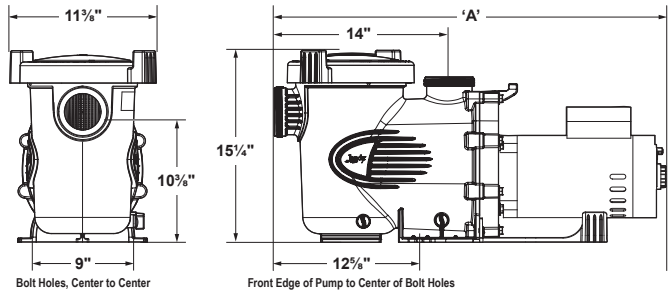

PERFORMANCE

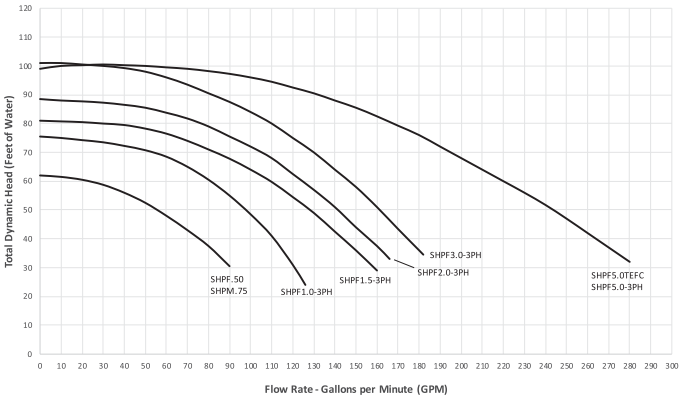

[1] WEF = weighted energy in kgal/kWh. WEF is a performance-based metric adopted by the Department of Energy to characterize the energy performance of dedicated purpose pool pumps per Department of Energy 10 CFR Parts 429 & 431.

[2] Always follow local building and safety codes for pipe sizing and guidelines.

[3] Exempt from DOE DPPP enforcement.

[4] Models SHPF5.0TEFC & SHPF5.0-3PH feature a TEFC Motor. 3-Phase model SHPF5.0-3PH is variable-frequency drive (VFD) compatible.

TRADE SERIES EXCLUSIVE

Intertek

Certified to NSF/ANSI/CAN 50

05119_SL

©2025 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 05119_SL