

**VS FloPro 1.85 HP**  
DUAL-VOLTAGE VS PUMP



# WHERE PERFORMANCE MEETS VALUE



OFFICIAL  
POOL  
EQUIPMENT  
SPONSOR



**VS FLOPRO™**  
VARIABLE-SPEED PUMP

# Affordable, full-featured variable-speed pump

A full-featured 1.85 HP variable-speed pump that delivers on price and value, the VS FloPro™ 1.85 is the perfect replacement for single-speed pumps up to 1.5 HP.

- 115V/230V Dual Voltage**  
The option to operate with either 115V or 230V power sources while delivering nearly identical hydraulic performance at both voltages means you can skip expensive mains power rewiring.
- Aftermarket Replacement**  
Included adjustable base allows for exact alignment with critical plumbing dimensions for easy aftermarket replacement of popular Pentair® and Hayward® single-speed and variable-speed pumps.
- Filtration and More**  
Perfect for use as a filtration pump on medium-sized pools or to drive small- to medium-sized water features.



VS FloPro with included adjustable base for seamless direct replacement of other pump models

- Lower Electricity Costs**  
The VS FloPro 1.85 offers impressive energy savings of over \$850 per year.<sup>1</sup>
- Compatible with Pentair® Automation Systems**  
The preinstalled SpeedSet™ Plus pump controller allows Jandy VS FloPro 1.85 to operate on these Pentair® Automation Systems:<sup>2</sup>
  - IntelliCenter® & IntelliCenter Lite
  - EasyTouch® PL4 & PSL4
  - IntelliTouch®
- Additional Features**
  - Totally Enclosed Fan Cooled Motor (TEFC) extends pump life
  - 2" unions included or utilize 2" internal threads
  - Four-Speed Dry Contact Relay Control
  - Easy Controller Setup auto detects connection to an automation system or a traditional controller, eliminating the need to adjust settings manually
  - Tool-free lid for easy debris removal
  - Ergonomic easy-transport handle

<sup>1</sup>Based on a 22,500 gallon pool with two turnovers per day at an energy cost of \$0.195/kWh vs. comparable single speed pumps; when tested in accordance with the applicable requirements of 10 CFR 429.

<sup>2</sup>Flow control is NOT supported

<sup>3</sup>1.85 HP x 1.215 SF = 2.25 THP.

<sup>4</sup>WEF = weighted energy factor in kcal/kWh. WEF is a performance-based metric adopted by the Department of Energy to characterize the energy performance of dedicated-purpose pool pumps. Department of Energy 10 CFR Parts 429 and 431.

<sup>5</sup>Always follow local building and safety codes for pipe sizing and guidelines.

<sup>6</sup>Small base with spacers included with all FloPro pumps. Large base is optional part R0546400.


## MODEL

| Model No.    | Description                                               |
|--------------|-----------------------------------------------------------|
| VSFHP185DVSP | VS FloPro, 1.85 HP, SpeedSet Plus Controller Preinstalled |

## SPECIFICATIONS

| Model No.    | HP <sup>3</sup> | WEF <sup>4</sup> | Voltage            | Max Watts | Amps         | Union Size | Rec. Pipe Size <sup>5</sup> | Weight    |
|--------------|-----------------|------------------|--------------------|-----------|--------------|------------|-----------------------------|-----------|
| VSFHP185DVSP | 1.85 HP         | 8.2<br>8.6       | 230 VAC<br>115 VAC | 1875W     | 13.5<br>17.4 | 2"         | 1½"-2"                      | 40.4 lbs. |

## PERFORMANCE

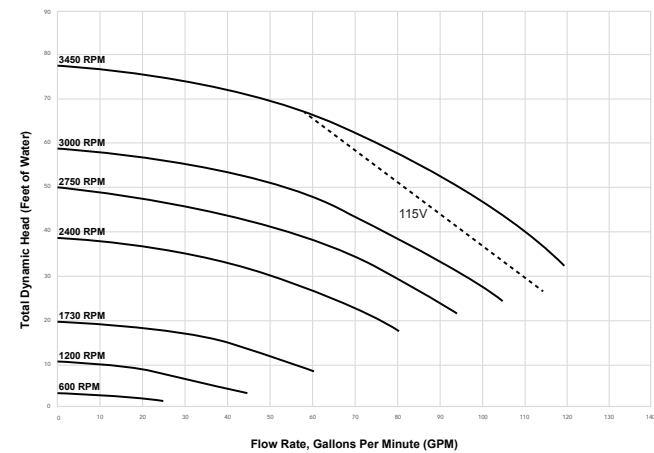

## ADJUSTABLE BASE CONFIGURATION<sup>6</sup>

| Base                       | Fits                                                                                       | A<br>Dimension | B<br>Dimension |
|----------------------------|--------------------------------------------------------------------------------------------|----------------|----------------|
| No Base                    | Hayward® Super Pump®<br>Pentair® SuperFlo®<br>Sta-Rite® SuperMax®                          | 7¾"            | 12¾"           |
| Small Base                 | Hayward® Super II™<br>Jandy® PlusHP and MaxHP™                                             | 8⅞"            | 13⅞"           |
| Small Base<br>w/ Spacers   | Pentair WhisperFlo® and<br>IntelliFlo® VSF, Sta-Rite Dyna Glas™                            | 9⅞"            | 14⅞"           |
| Small Base<br>+ Large Base | Sta-Rite Max-E-Pro®<br>Sta-Rite Dura-Glas™<br>Sta-Rite Dura-Glas II<br>Sta-Rite Max-E-Glas | 10¾"           | 15¾"           |

## DIMENSIONS

