


Jandy

The **SMARTEST** Way
to Heat Your Pool and Spa



Take the Guesswork out of **Pool Heating**

Engineered for installation ease and cost-efficient operation, the JXiQ™ gas pool & spa heater features SMART sensors to ensure proper installation and performance and provide convenient functionality.



Low Gas Pressure Sensor

Ensures there's enough
gas pressure to safely ignite



Estimates Heat Up Time

Heat When You Want. Save When You Don't.

Innovative VersaFlo Integrated Bypass automatically directs water through the heat exchanger only when heat is needed.

*VersaFlo Integrated Bypass is available for select models.



Largest Display in the Industry

Digital display is 50% larger
than before and capable of
showing 80 characters



Optimize Flow

Measures temperature rise
between the inlet and outlet
to optimize flow and avoid
heat exchanger failures




**5-Year Heat Exchanger
Limited Warranty**



Auto-Sensing Power Input

Automatically adjusts to supplied power when installed, no cards to flip and no wires to change



Superior Corrosion Defense



Versa Plumb® Ready

Installation in the Versa Plumb system reduces plumbing costs and increases hydraulic efficiency.



Flexible Installation. Easy Servicing.

Top is easily removed and rotated 180 degrees for increased accessibility; includes flip up electrical panel for more compact pool pad setups.



Keeps Critters Out

No more chewed up wires. The JXiQ™ is made with a fully encased shell to protect against rodent intrusion and damage.



Ultra-Compact Lightweight Design

Fits on a 2' x 2' pad and is 38% lighter with a 28% smaller footprint.*

*Compared to popular competitor models.


Access What You Need, When You Need It

Pool Pro

Home Owners



Trouble-Free
Troubleshooting

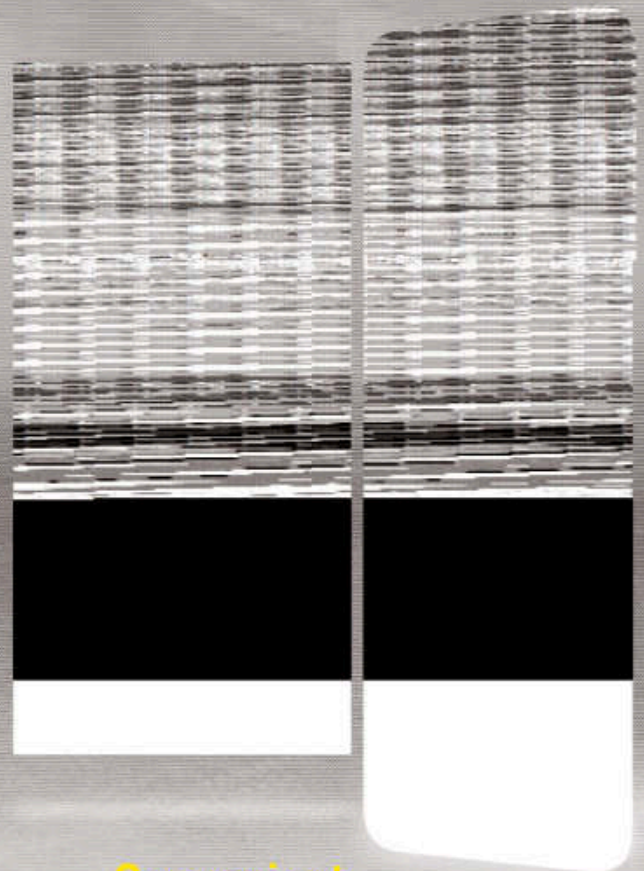

Convenient
Control



PRO SPECS

- Available in three BTU sizes, 200K, 260K, 399K, and offered in both natural and propane gas models
- Venturi-driven air and gas mix for enhanced performance
- Reliable, balanced flow and temperature control with thermal regulator valve
- Differentiated limit switches meet applicable product safety standards
- Corrosion-resistant temperature sensors for reliable operation
- ASME compliant models available with robust heat exchanger tubes and corrosion resistant bronze headers

Standard Models


Part No.	Firing Rate	Gas Type	Heat Exchanger	Thermal Efficiency	Dim A	Weight	Vent Diameter*	Min. GPM	Max. GPM
JXiQ200NK	200K BTU	Natural Gas	Copper	83%	34.5	117 lbs.	6" (15 cm)	30	100
JXiQ260NK	260K BTU	Natural Gas	Copper	84%	34.5	120 lbs.	7" (18 cm)	30	100
JXiQ400NK	399K BTU	Natural Gas	Copper	84%	34.5	126 lbs.	8" (20 cm)	30	100
JXiQ200PK	200K BTU	Propane	Copper	83%	34.5	117 lbs.	6" (15 cm)	30	100
JXiQ260PK	260K BTU	Propane	Copper	84%	34.5	120 lbs.	7" (18 cm)	30	100
JXiQ400PK	399K BTU	Propane	Copper	84%	34.5	126 lbs.	8" (20 cm)	30	100
JXiQ400NNK	399K BTU	Natural Gas	Cupronickel	83%	34.5	126 lbs.	8" (20 cm)	30	100
JXiQ400PNK	399K BTU	Propane	Cupronickel	83%	34.5	126 lbs.	8" (20 cm)	30	100

ASME® Compliant

JXiQ260NC	260K BTU	Natural Gas	Copper	84%	31.6	163 lbs.	7" (18 cm)	30	100
JXiQ260PC	260K BTU	Propane	Copper	84%	31.6	163 lbs.	7" (18 cm)	30	100
JXiQ400NC	400K BTU	Natural Gas	Copper	84%	31.6	168 lbs.	8" (20 cm)	30	100
JXiQ400PC	400K BTU	Propane	Copper	84%	31.6	168 lbs.	8" (20 cm)	30	100
JXiQ260NS	260K BTU	Natural Gas	Cupronickel	83%	31.6	163 lbs.	7" (18 cm)	30	100
JXiQ260PS	260K BTU	Propane	Cupronickel	84%	31.6	163 lbs.	7" (18 cm)	30	100
JXiQ400NS	400K BTU	Natural Gas	Cupronickel	84%	31.6	168 lbs.	8" (20 cm)	30	100
JXiQ400PS	400K BTU	Propane	Cupronickel	84%	31.6	168 lbs.	8" (20 cm)	30	100

*Minimum vent pipe size for Category I installations.

DIMENSIONS

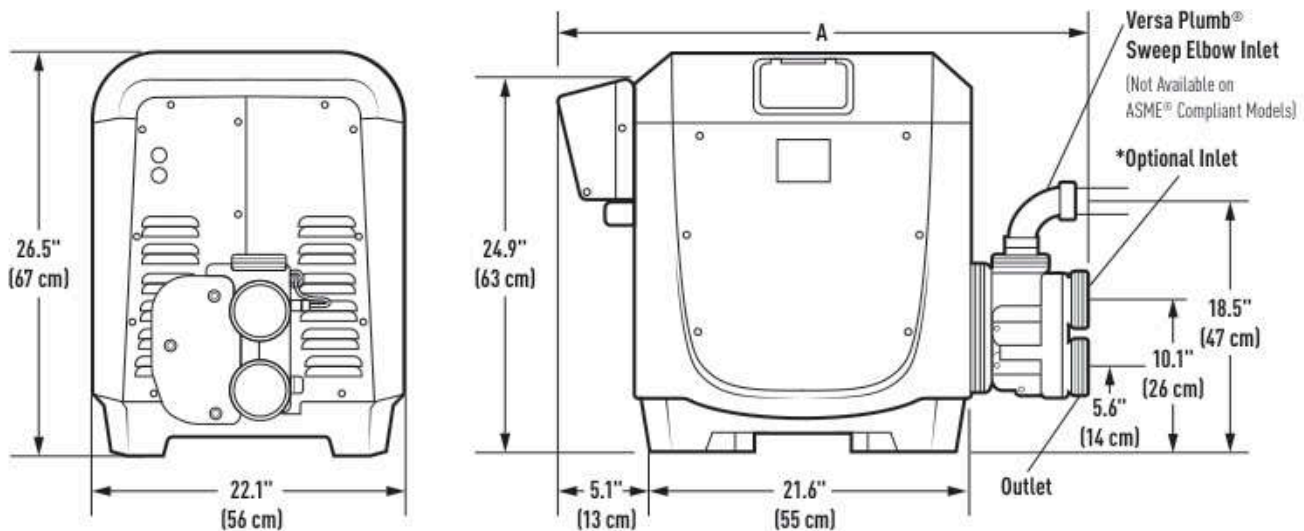

TRADE SERIES
EXCLUSIVE



A Fluidra Brand | Jandy.com | 1.800.822.7933

©2026 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. Apple and the Apple logo are trademarks of Apple, Inc., registered in the U.S. and other countries. App Store is a service mark of Apple, Inc. registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google LLC. 69088_SL



69088_SL