

Jandy®

HEAT. CHILL.
Perfect Comfort.

NOW WITH 160K BTUS

OFFICIAL POOL EQUIPMENT SPONSOR

USA SWIMMING

VERSATEMP™
HEAT/CHILL PUMP

Now with 160K BTUs for 40% Faster Heat & Chill

Meet the powerful VersaTemp™ Heat/Chill Pump, now with up to 160K BTUs. Heat or chill your pool and spa up to 40% faster* while keeping energy costs in check. No costly installs. No loud, disruptive noise. Just powerful, efficient comfort all year round.

More Power. Faster Heat.

Now available with 160K BTUs to deliver up to 40% faster* heating

Power Defrost

Activates heat reversing technology to maintain reliable performance in cooler temperatures

High-Capacity Cooling Power

When hot days push pool temps too high, especially in desert and tropical climates, VersaTemp brings it down fast

Cold Plunge Ready


Cool your plunge pool or spa down as low as 40°F

*When compared to 110K BTU model

SoundShield™ Technology


You don't have to sacrifice heating power for lower noise. VersaTemp keeps sound levels down with a swept-wing blade design and decibel dampening acoustic blanket

SOUNDSHIELD™
Integrated sound-dampening technology

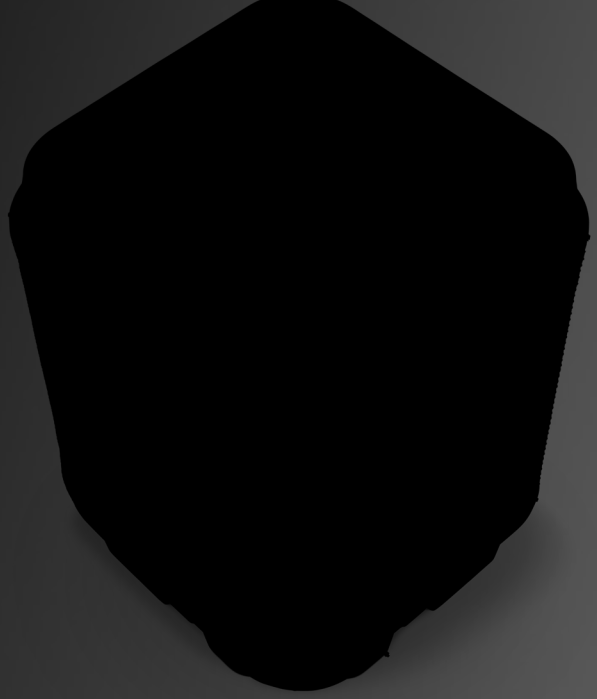

Skip the Costly Panel Upgrade

No need to upgrade your electrical panel—160K BTU unit runs on a 50 amp breaker

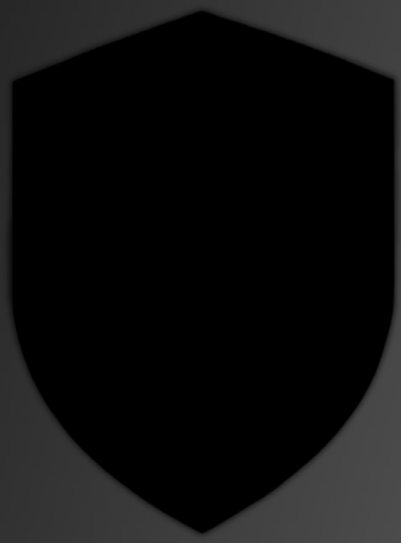



HEAT EXCHANGER
5 YEAR
LIMITED WARRANTY

Anytime, Anywhere Control

Enjoy the convenience of on-the-go operation with the iAquaLink app.

iAquaLink®

Over 50K 5-star reviews!

★★★★★


Download on the App Store

GET IT ON Google Play


SPECIFICATIONS

	JRT2000R	JRT2500R	JRT3000R	JRT4001R	JRT3000R3
Output (BTU)	103,000	116,000	130,000	160,000	130,000
Input (kWH)	4.72	5.23	6.57	7.95	6.20
COP	6.4	6.5	5.8	5.9	6.1
Output (BTU)	96,000	109,000	124,000	148,000	124,000
COP	6.1	6.1	5.6	5.7	5.9
Output (BTU)	62,000	70,000	82,000	101,000	85,000
COP	4.1	4.1	4.0	4.4	4.4
Voltage	208V-230V/60Hz	208V-230V/60Hz	208V-230V/60Hz	208V-230V/60Hz	208V/60Hz 3-Phase
Minimum Circuit Ampacity	38	39	40	50 @ 230VAC 55 @208VAC	40
Max Over Current Protection	40	50	50	70	50
LRA	178	182	182	198	179
RLA	28.3	29	32.5	42	33
Compressor			Scroll		
Optimal Water Flow (GPM)	42	48	57	64	57
Minimum Water Flow (GPM)	20	20	30	30	30
Maximum Water Flow (GPM)	70	70	70	80	70
Weight (lbs)	232	242	252	347	260

DIMENSIONS

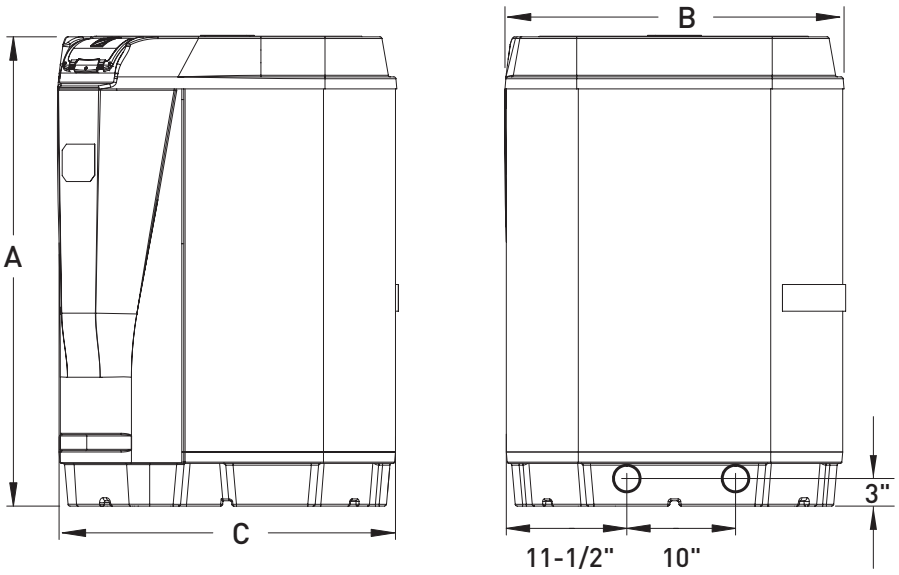

MODEL	A	B	C
JRT2000R	42"	32"	32"
JRT2500R	42"	32"	32"
JRT3000R	45"	32"	32"
JRT4001R	45"	32"	32"
JRT3000R3	45"	32"	32"



©2026 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. Apple and the Apple logo are trademarks of Apple, Inc., registered in the U.S. and other countries. App Store is a service mark of Apple, Inc., registered in the U.S. and other countries. Google Play and Google Play logo are trademarks of Google LLC. All other trademarks are the property of their respective owners. 34267_SL

TRADE SERIES EXCLUSIVE

Intertek

AHRI CERTIFIED® www.ahridirectory.org

Globally Recognized. Industry Respected.

34267_SL