


**SUBMITTAL
DATA**

Schwank
INNOVATIVE HEATING SOLUTIONS



SCHWANK GAS FIRED
INFRA-RED HEATERS
LUMINOUS SERIES
ECOSCHWANK 36/52

PROJECT:	
ENGINEER:	
CONTRACTOR:	
DISTRIBUTOR:	
SCHWANK MODEL #:	
FUEL:	☐ N.G. ☐ LP.G.
APPROVED BY:	
DATE:	
APPROVAL #:	



NOTICE:

Schwank reserves the right to make changes to equipment and specifications without obligation or notification.

This publication, or parts thereof, may not be reproduced in any form, without prior written consent from Schwank.

Unauthorized use or distribution of this publication is strictly prohibited.

Schwank

Customer and Technical Services

Phone: 1-877-446-3727


Fax : 1-866-361-0523

e-mail: csr@schwankgroup.com

www.schwankgroup.com

DIAGRAMS AND SPECIFICATIONS:

DIMENSION DIAGRAM FOR THE LUMINOUS HEATERS

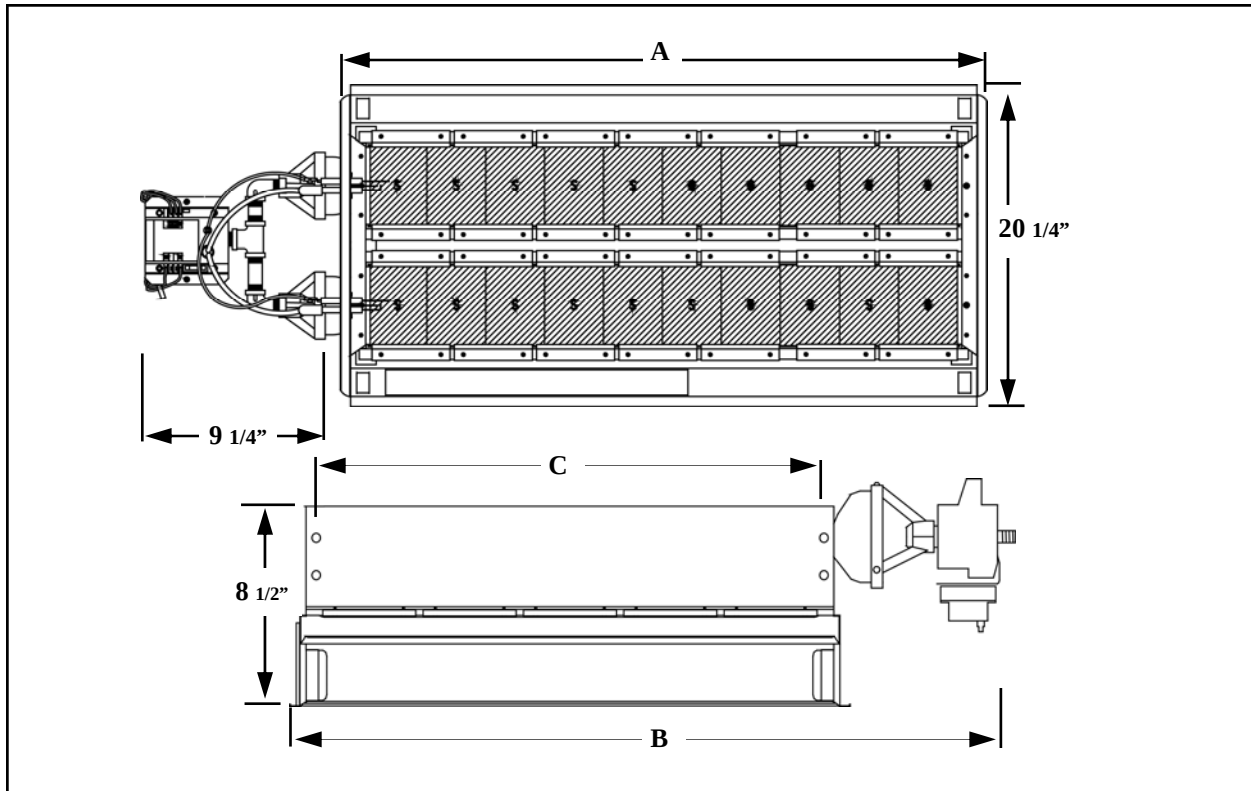


QUANTITY ON PROJECT	MODEL NO.	A	B	C (Suspension Points)	RATING BTU/HR	WEIGHT LBS.
	ecoSchwank 36	37 1/2"	49 1/2"	36 3/8"	150,000	60
	ecoSchwank 52	54 1/4"	64 3/4"	51"	200,000	70

ELECTRICAL: 24V, 60 Hz, 0.55 AMPS

GAS SUPPLY	☐	NATURAL GAS	MINIMUM LINE PRESS MAXIMUM LINE PRESS MANIFOLD PRESSURE	6" w.c. 14" w.c. 5" w.c.	1/2" GAS INLET PIPE SIZE
	☐	PROPANE GAS	MINIMUM LINE PRESS MAXIMUM LINE PRESS MANIFOLD PRESSURE	11" w.c. 14" w.c. 10" w.c.	1/2" GAS INLET PIPE SIZE

MINIMUM CLEARANCE TO COMBUSTIBLE MATERIAL

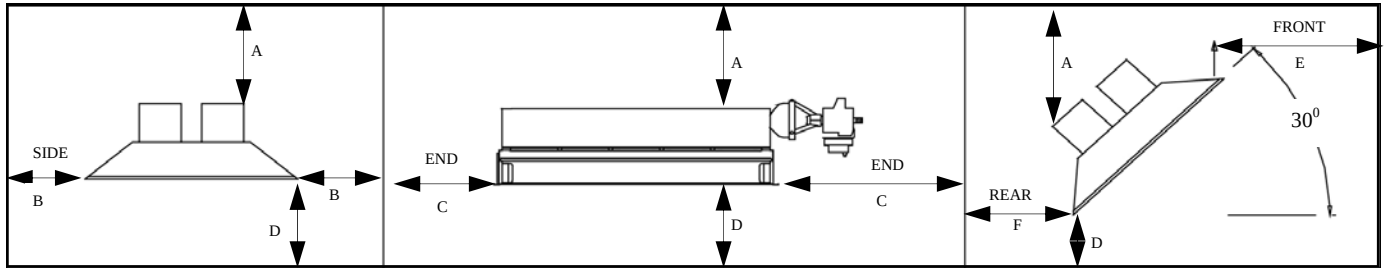

HORIZONTAL MOUNT: CLEARANCE TO COMBUSTIBLES CHART

ecoSchwank Series	36	52
Quantity		
Top of Heater (A)	52"	52"
Sides of Heater (B)	55"	55"
End of Heater (C)	39"	39"
Bottom of Heater (D)	121"	121"

ANGLE MOUNT: CLEARANCE TO COMBUSTIBLES CHART

ecoSchwank Series	36	52
Quantity		
Top of Heater (A)	52"	52"
Front of Heater (E)	84"	84"
Rear of Heater (F)	55"	55"
End of Heater (C)	39"	39"
Bottom of Heater (D)	121"	121"

SUGGESTED MOUNTING DISTANCE FOR COMFORT.*

ecoSchwank Model L/N	Horizontal 36	Horizontal 52	Angle 36	Angle 52
QUANTITY				
Average Mounting Height in Feet	32'	34'	26'	28'
Maximum Heater Spacing (short axis)	45'	50'	45'	50'
Maximum Distance Between Heater Rows	75'	80'	100'	100'
Distance from Wall to Rear of Heater	32'	34'	Service Clearance	Service Clearance

COMPONENT DESCRIPTION:

QUANTITY		
	THERMOSTAT OPTIONS	SCHWANK TRU-TEMP SET BACK STAT - WITH RADIANT & AMBIENT SENSORS AND AUTOMATIC UNOCCUPIED MODE
		SCHWANK THERMO CONTROL PLUS
		120 VOLT LINE VOLTAGE
		24 VOLTS
IGNITION ☐ DIRECT SPARK IGNITION MODULE		
COMBINATION GAS VALVE <div>☐ 24 VOLT ☐ NATURAL GAS 5" W.C. MANIFOLD PRESSURE</div> <div>☐ PROPANE 11" W.C. MANIFOLD PRESSURE</div> <div>☐ OTHER _____</div>		
REFLECTORS	ALUMINIZED STEEL	
VENTURI TUBE	DUAL ALUMINIZED STEEL BUILT INTO BURNER HOUSING	
BURNER	DUAL WITH COMPLETE IGNITION / SENSING SYSTEM	
CERAMIC TILE	SCHWANK EFFECT TILE 14/4 WITH INCREASED SURFACE INDENTATIONS AND HARD FINISHED EDGES	
TILE RETAINERS	STAINLESS STEEL WITH STAINLESS STEEL NUT AND BOLT FASTENERS	
COMBUSTION	"COLD STATE" COMBUSTION OF 1,100 DEGREES CELSIUS TO ENSURE MINIMUM EMISSIONS	