

INSTALLATION INSTRUCTIONS - WGW24 Electronic Water Overflow Alarm


Specifications

- Supply Voltage 18-30 VAC
- Relay Contacts Type "C"
- Max. Contact Current 5A@24VAC/DC
- Sensor Corrosive resistant Monel™ wire pair
- LED Condition Indicators
 - Green Normal operation
 - Red Alarm condition
- Wire Length 6 feet
- Installation location Flat on monitoring area, or attached to the vertical surface
- Power consumption 0.5 watts
- Housing Water resistant
- Dimensions 2.8" x 1.8" x 1.15"
- Weight 4.5 oz.



Disconnect power before servicing equipment.



Cable Wires

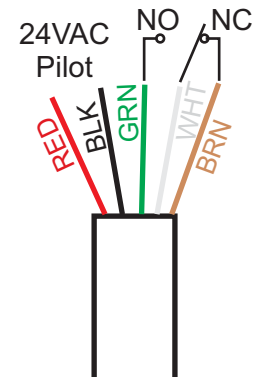


Floor Installation



Wall Installation with adhesive pad

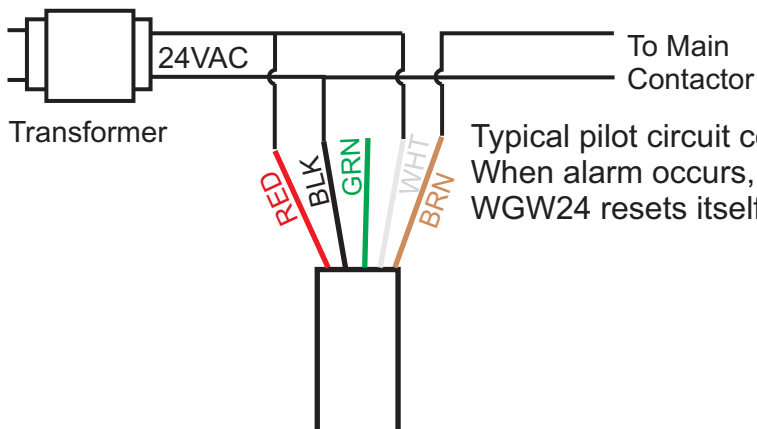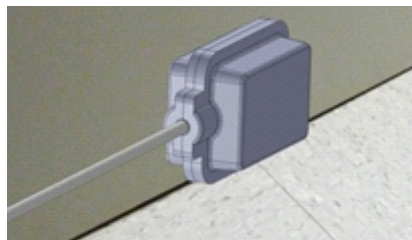

Typical pilot circuit connections.
When alarm occurs, the WGW24 disconnects pilot circuit.
WGW24 resets itself when the alarm condition ends.

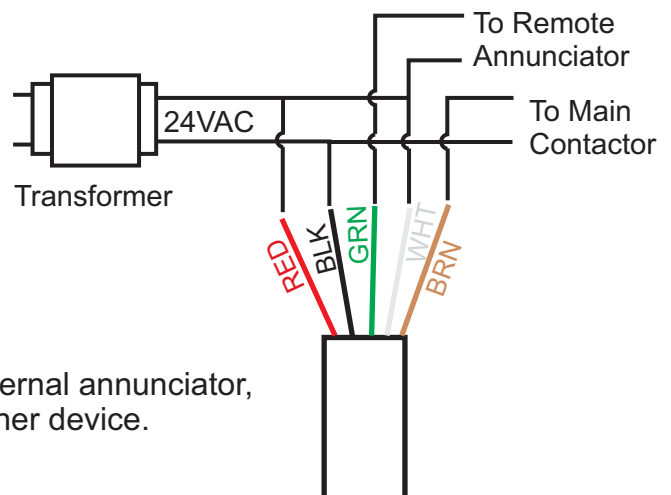

Connection to additional external annunciator,
such as a buzzer, light or other device.



800.333.9125 - techsupport@supco.com - www.supco.com