PAA-BA36NL & PUZ-AK36NLHZ
32,000 BTU/H CASED COIL INDOOR UNIT
32,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT

Job Name:			
System Reference:		**Date:**	

INDOOR Unit ... PAA-BA36NL

OUTDOOR Unit ... PUZ-AK36NLHZ

INDOOR UNIT FEATURES

- Furnace Compatible: Compatible with most gas furnaces, intelli-HEAT® allows for Intelligent Switchover between the furnace and heat pump operation. *Mitsubishi Electric air-conditioner and heat pump systems should only be connected with ANSI-Z21.47/CSA2.3 certified furnaces
- Intelligent Switchover: Intelligent Switchover from electric heat pump to gas furnace operation in extreme cold for consistent comfort. The system can also be set to switch based optimal energy efficiency and to reduce your carbon footprint.
- High Quality Drain Pan: High quality drain pan material with high heat tolerance and low moisture absorption
- Multi-Position Installation: Versatile installation options, including horizontal (left or right) and vertical (up or down) orientations, with included drain pans to facilitate easy setup for any configuration.
- Available Widths: Available in 14.5”, 17.5”, and 21” widths

OUTDOOR UNIT FEATURES

- H2i® Hyper-Heating: 100% heating performance down to 5° F with guaranteed heating down to -13° F.
- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Base Pan Heater: This advanced base pan heater helps to prevent interrupted operation due to water freezing after a defrost cycle, ensuring your warmth and comfort during colder weather.
- Seacoast Protection: Designed to protect against the corrosive effects of environments that are in close proximity to the sea.
- Flash Injection: Flash Injection enables optimum compressor performance when it is running at higher speeds to maintain indoor comfort during cold temperatures.

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

SPECIFICATIONS: PAA-BA36NL & PUZ-AK36NLHZ

Cooling at 95F[1]	Maximum Capacity	Btu/h	36000
	Rated Capacity	Btu/h	32000
	Minimum Capacity	Btu/h	16200
	Maximum Power Input	W	3200
	Rated Power Input	W	2720
	Moisture Removal	Pints/h	6.80
	Sensible Heat Factor		0.78
	Power Factor [208V / 230V]	%	87 / 87
Heating at 47F[2]	Maximum Capacity	Btu/h	42000
	Rated Capacity	Btu/h	42000
	Minimum Capacity	Btu/h	19200
	Maximum Power Input	W	3500
	Rated Power Input	W	3500
	Power Factor [208V / 230V]	%	90 / 90
Heating at 17F[3]	Maximum Capacity	Btu/h	38000
	Rated Capacity	Btu/h	31200
	Maximum Power Input	W	6220
	Rated Power Input	W	3810
Heating at 5F[5]	Maximum Capacity	Btu/h	38000
	Maximum Power Input	W	5860
Heating at -13F[9]	Maximum Capacity	Btu/h	28400
Efficiency	SEER2		18.10
	EER2[1]		11.70
	HSPF2 [IV]		9.40
	COP at 47°F[2]		3.5
	COP at 17°F at Maximum Capacity[3]		1.70
	COP at 5°F at Maximum Capacity[5]		1.90
	COP at -13°F at Maximum Capacity[9]		1.82
	ENERGY STAR® Certified		Yes
Electrical	Voltage, Phase, Frequency	V AC / V AC , ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	30
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	MCA	A	0.2
	Rated Airflow, Dry	CFM	1050
	Maximum Airflow, Dry	CFM	1201
	Minimum Airflow, Dry	CFM	800
	Internal Static Pressure [at Rated CFM]	in.WG	0.2
	Drain Pipe Size O.D.	inch [mm]	3/4 [19.05]
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	17-9/16 x 21-7/16 x 32 [445 x 543 x 812]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	19-5/16 x 25-5/16 x 37-8/16 [491 x 695 x 953]
	Unit Weight [Cased Coil Only]	lbs [kg]	72.8 [33.0]
	Control Box Weight	lbs [kg]	5.1 [2.3]
	Package Weight	lbs [kg]	97.0 [44.0]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	deg F , deg F / deg F , deg F	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	deg F	83 / 50
Outdoor Unit	MCA	A	29
	MOCP	A	48
	Fan Motor Output	W	74+74
	Airflow Rate Cooling	CFM	3740
	Airflow Rate Heating	CFM	3740
	Defrost Method		Reverse Cycle

Notes

[1]Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test
[2]Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
[3]Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB
[5]Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB
[9]Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB
[*]Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Heat pump system with wind baffle: 0°F - 115°F. • Refer to wind baffle documentation for further information.
[**]Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

Outdoor Unit	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling[1]	dB (A)	52
	Sound Pressure Level, Heating[2]	dB (A)	53
	Compressor Type		Twin Rotary
	Compressor Model		MRK36FFGMC
	Compressor Oil [Type // Charge]	// oz	RM68EH // 45
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 14 x 52-43/64 [1050 x 355 x 1338]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	42-15/16 x 17-3/4 x 58-5/16 [1090 x 450 x 1480]
	Unit Weight	lbs [kg]	231 [105]
	Package Weight	lbs [kg]	258 [117]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	F	115 / 23
	Heating Intake Air Temp [Maximum / Minimum]	F , F / F , F	70 , 59 / -13 , -13
	Heating Thermal Lock-out / Re-start Temperatures**	F	-22 / -13
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	9 , 14
	Maximum Pre-Charged Piping Length	ft [m]	100 [30]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.6
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Maximum Piping Length	ft [m]	100 [30]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15

Notes

[1]Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test
[2]Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
[3]Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB
[5]Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB
[9]Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB
*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Heat pump system with wind baffle: 0°F - 115°F. • Refer to wind baffle documentation for further information.
**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT ACCESSORIES: PAA-BA36NL

Condensate	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐ X88-721
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐ SI30-230
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐ X87-835
	Blue Diamond (MaxiBlue Advanced) Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	☐ X87-711
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐ COMBI
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
Control Interface	Thermostat Interface	☐ PAC-US446CN-1
	kumo station® for Comfort app	☐ PAC-WHS01HC-E
	Operation and Error Status Output Adapter ¹	☐ PAC-SF40RM-E
	Procon BACnet® and Modbus® Interface	☐ PAC-UKPRC001-CN-1
	Wireless Interface 2 for Comfrot app	☐ PAC-USWHS002-WF-2
	IT Extender	☐ PAC-WHS01IE-E
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
	(30A/600V/UL) [fits 2” X 4” utility box] - White	☐ TAZ-MS303W
Lineset	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐ MPLS385812T-30
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐ MPLS385812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 10 feet	☐ MPLS385812T-10
	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐ MPLS385812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐ MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐ MPLS385812T-100
N/A		☐ Unknown
Power Supplies & Auxiliary Components	ERV On/Off Input Adapter for CNER on SVZ PEAD and PVA models	☐ PAC-740
Remote Sensor	Wall Mounted Remote Temperature Sensor	☐ PAC-SE41TS-E
	Wireless temperature and humidity sensor for Comfort app	☐ PAC-USWHS003-TH-1
	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐ PAC-USSEN002-FM-1
Terminal Signal Adapter	Backup Heat Relay Kit	☐ CN24RELAY-KIT-CM3
	3-Pin Wiring Harness	☐ PAC-715AD
	5-Pin Wiring Harness	☐ PAC-725AD
Wired Remote Controller	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
	Deluxe MA Wired Remote Controller	☐ PAR-42MAAUB
	Simple MA Remote Controller	☐ PAC-YT53CRAU-J
	Touch MA Remote Controller	☐ PAR-CT01MAU-SB
Wireless Remote Controller	Universal Wireless Receiver for PAR-FL32MA-E	☐ PAR-FA32MA-W
	Wireless RedLINK™ Remote Controller	☐ MHK2
	Universal Wireless Receiver for PAR-FL32MA-E	☐ PAR-FA32MA-E
	Wireless Remote Contoller	☐ PAR-SL101A-E
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB
Notes		

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT ACCESSORIES: PUZ-AK36NLHZ

Air Outlet Guide	Air Outlet Guide 1 Piece	☐	PAC-SH96SG-E (two pieces required)
Centralized Drain Pan	Centralized Drain Pan	☐	PAC-SH97DP-E
Control/Service Tool	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
	ControlService Tool	☐	PAC-SK52ST
Drain Socket	Drain Socket	☐	PAC-SG61DS-E
Hail Guards	Hail Guard	☐	HG-A2
M-NET Converter	M-Net Interface for P-Series	☐	PAC-SJ95MA-E
Mini-Split Wire	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	☐	ULTRILITE2
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-5
Stand	18 Dual Fan Stand	☐	QSMS1802M
	24 Dual Fan Stand	☐	QSMS2402M
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	Outdoor Unit Stand 12 High	☐	QSMS1202M
Terminal Signal Adapter	3-Pin Wiring Harness	☐	PAC-715AD
	5-Pin Wiring Harness	☐	PAC-725AD
Wind Baffle	Front Wind Baffle	☐	WB-PA3 (two pieces required)
Notes			

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT DIMENSIONS: PAA-BA36NL

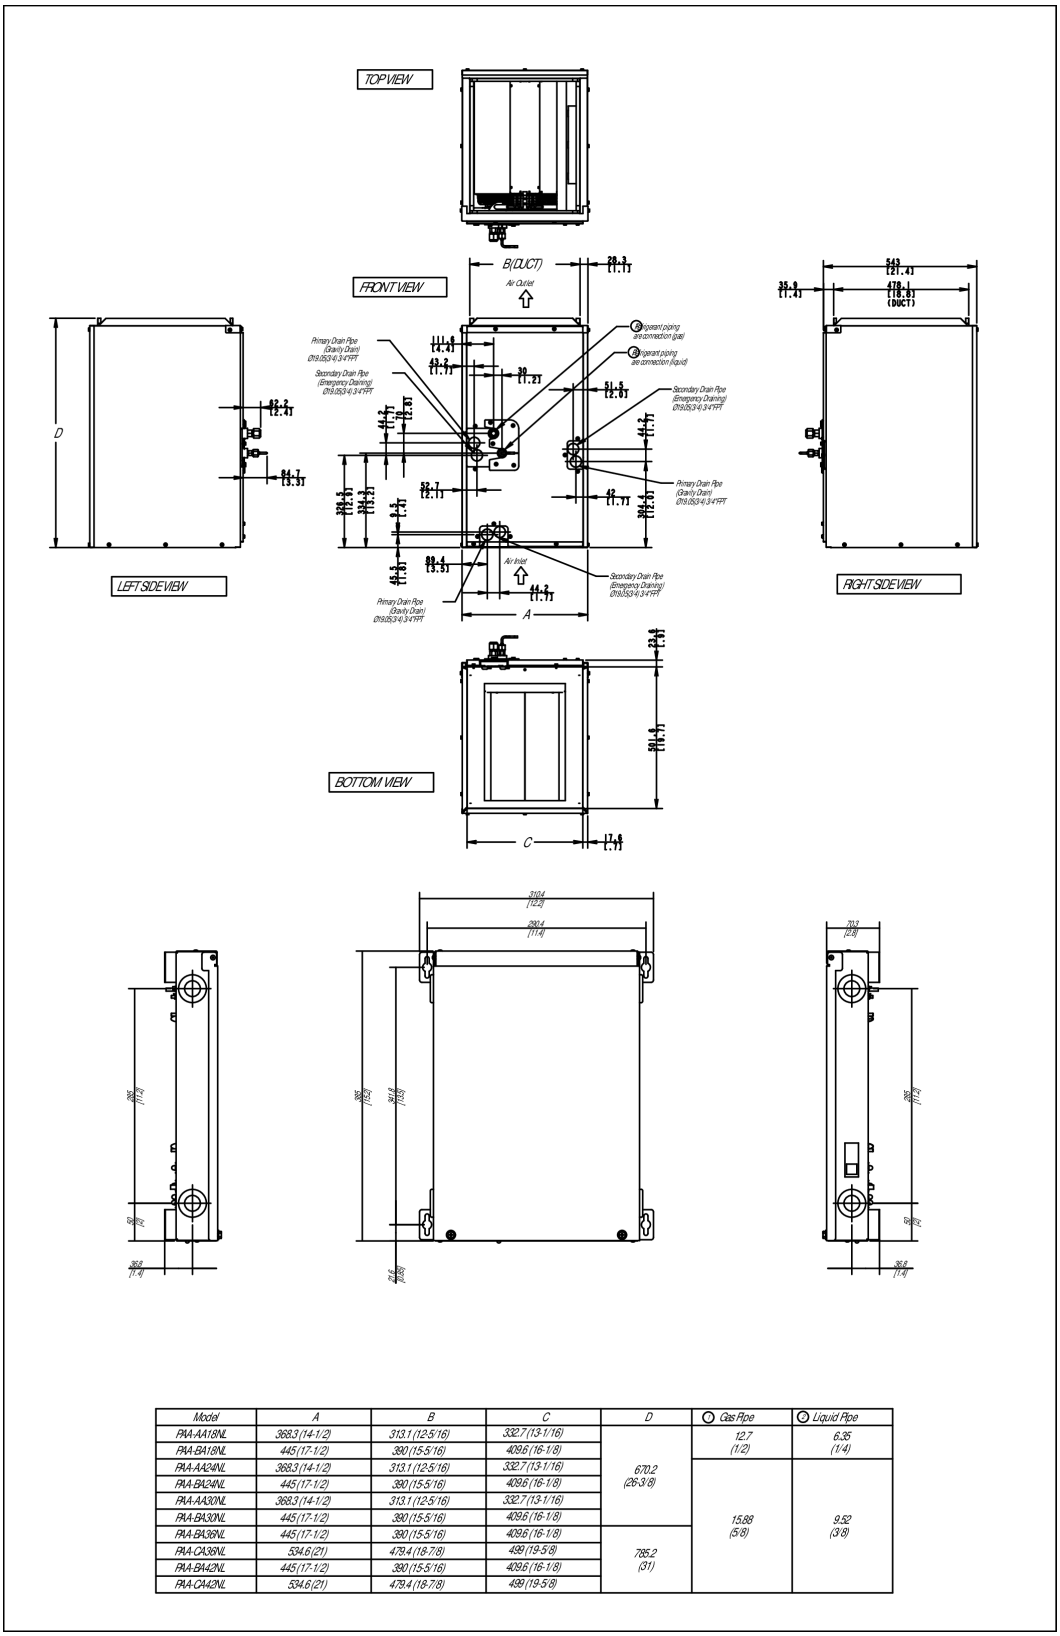

Model	A	B	C	D	ⓖ Gas Pipe	ⓛ Liquid Pipe
PAA-AA18NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)	670.2 (26-3/8)	12.7 (1/2)	6.35 (1/4)
PAA-BA18NL	445 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)			
PAA-AA24NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)		15.88 (5/8)	9.52 (3/8)
PAA-BA24NL	445 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)			
PAA-AA30NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)			
PAA-BA30NL	445 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)			
PAA-BA36NL	445 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)	785.2 (31)		
PAA-CA36NL	534.6 (21)	479.4 (18-7/8)	499 (19-5/8)			
PAA-BA42NL	445 (17-1/2)	390 (15-5/16)	409.6 (16-1/8)			
PAA-CA42NL	534.6 (21)	479.4 (18-7/8)	499 (19-5/8)			

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT DIMENSIONS: PUZ-AK36NLHZ

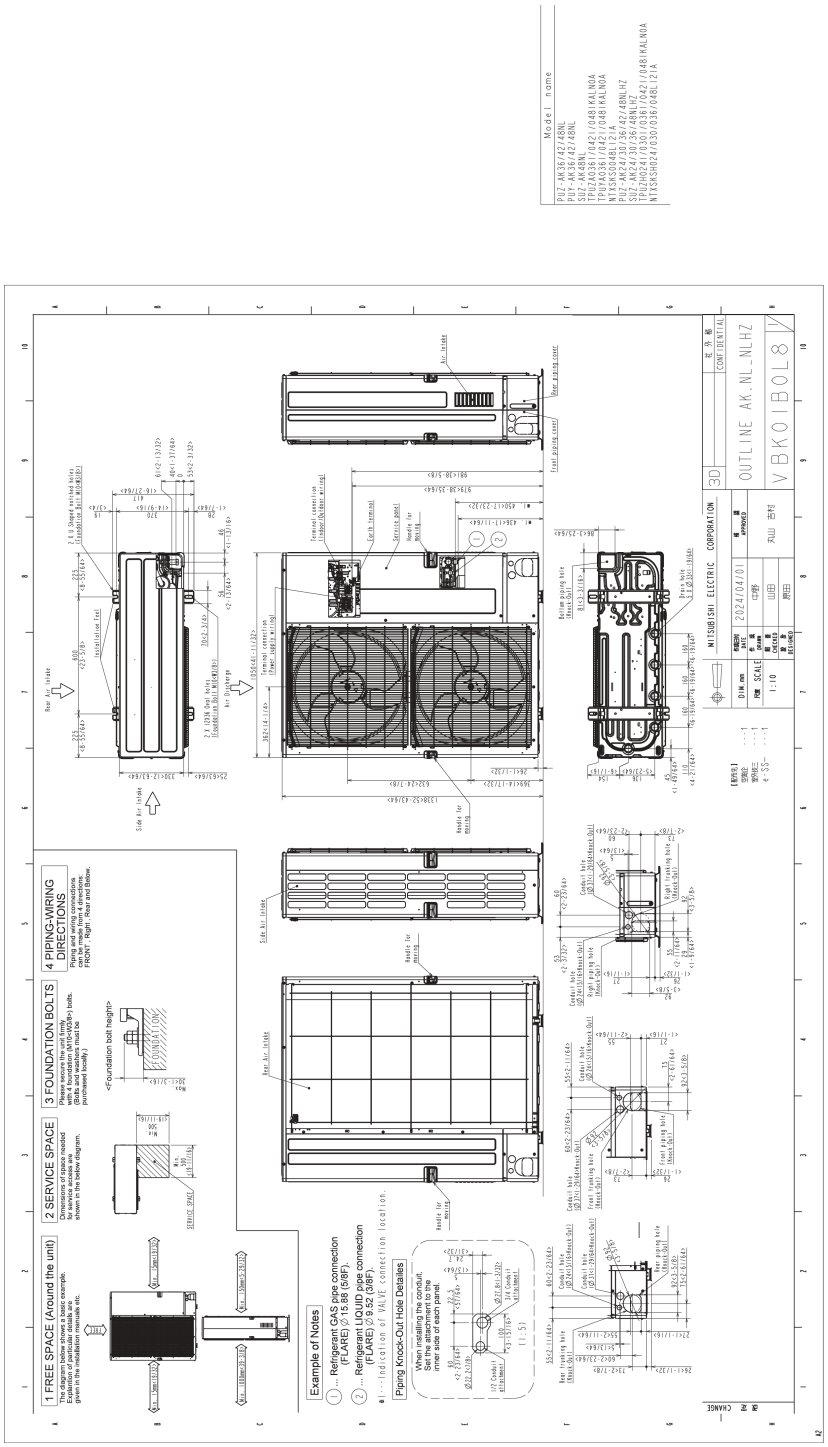

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-04_PROPIN

Specifications are subject to change without notice.

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.