PAA-BA36NL & SUZ-AK36NLHZ
36,000 BTU/H CASED COIL INDOOR UNIT
36,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT

Job Name:			
System Reference:		**Date:**	

INDOOR Unit ... PAA-BA36NL

OUTDOOR Unit ... SUZ-AK36NLHZ

INDOOR UNIT FEATURES

- Wi-Fi Optional: A Wireless Interface Adapter can be ordered as an accessory for field installation.
- Intelligent Switchover: Intelligent Switchover from electric heat pump to gas furnace operation in extreme cold for consistent comfort. The system can also be set to switch based optimal energy efficiency and to reduce your carbon footprint.
- High Quality Drain Pan: High quality drain pan material with high heat tolerance and low moisture absorption
- Multi-Position Installation: Versatile installation options, including horizontal (left or right) and vertical (up or down) orientations, with included drain pans to facilitate easy setup for any configuration.
- Available Widths: Available in 14.5”, 17.5”, and 21” widths
- Furnace Compatible: "Compatible with most gas furnaces, intelli-HEAT® allows for Intelligent Switchover between the furnace and heat pump operation. * *Mitsubishi Electric air-conditioner and heat pump systems should only be connected with ANSI-Z21.47/CSA2.3 certified furnaces"

OUTDOOR UNIT FEATURES

- H2i® Hyper-Heating: 100% heating capacity down to 5° F .
- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Base Pan Heater: This advanced base pan heater helps to prevent interrupted operation due to water freezing after a defrost cycle, ensuring your warmth and comfort during colder weather.
- Seacoast Protection: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.
- Flash Injection: Flash Injection enables optimum compressor performance when it is running at higher speeds to maintain indoor comfort during cold temperatures.

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

SPECIFICATIONS: PAA-BA36NL & SUZ-AK36NLHZ

Cooling at 95F[1]	Maximum Capacity	Btu/h	36000
	Rated Capacity	Btu/h	32000
	Minimum Capacity	Btu/h	16200
	Maximum Power Input	W	3200
	Rated Power Input	W	2720
	Moisture Removal	Pints/h	6.80
	Sensible Heat Factor		0.78
	Power Factor [208V / 230V]	%	87 / 87
Heating at 47F[2]	Maximum Capacity	Btu/h	42000
	Rated Capacity	Btu/h	42000
	Minimum Capacity	Btu/h	19200
	Maximum Power Input	W	3500
	Rated Power Input	W	3500
	Power Factor [208V / 230V]	%	90 / 90
Heating at 17F[3]	Maximum Capacity	Btu/h	38000
	Rated Capacity	Btu/h	31200
	Maximum Power Input	W	6220
	Rated Power Input	W	3810
Heating at 5F[5]	Maximum Capacity	Btu/h	38000
	Maximum Power Input	W	5860
Heating at -13F[9]	Maximum Capacity	Btu/h	28400
Efficiency	SEER2		17.20
	EER2[1]		11.70
	HSPF2 [IV]		8.90
	COP at 47°F[2]		3.5
	COP at 17°F at Maximum Capacity[3]		1.70
	COP at 5°F at Maximum Capacity[5]		1.90
	COP at -13°F at Maximum Capacity[9]		1.82
	ENERGY STAR® Certified		Yes
Electrical	Voltage, Phase, Frequency	V AC / V AC , ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	30
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	MCA	A	0.2
	Breaker Size	A	15
	Rated Airflow, Dry	CFM	1050
	Maximum Airflow, Dry	CFM	1201
	Minimum Airflow, Dry	CFM	800
	Internal Static Pressure [at Rated CFM]	in.WG	0.2
	Drain Pipe Size O.D.	inch [mm]	3/4 [19.05]
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	17-9/16 x 21-7/16 x 32 [445 x 543 x 812]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	19-5/16 x 25-5/16 x 37-8/16 [491 x 695 x 953]
	Unit Weight [Cased Coil Only]	lbs [kg]	72.8 [33.0]
	Control Box Weight	lbs [kg]	5.1 [2.3]
	Package Weight	lbs [kg]	97.0 [44.0]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50
Outdoor Unit	MCA	A	29
	MOCP	A	48
	Fan Motor Output	W	74+74
	Airflow Rate Cooling	CFM	3740
	Airflow Rate Heating	CFM	3740

Notes

[1]Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB
[2]Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
[3]Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB
[4]Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB. Not AHRI rated
[9]Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB
[*]Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
[**]Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

Outdoor Unit	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling[1]	dB (A)	52
	Sound Pressure Level, Heating[2]	dB (A)	53
	Compressor Type		Twin Rotary
	Compressor Model		MRK36FFGMC
	Compressor Oil [Type // Charge]	// oz	RM68EH // 45
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 14 x 52-43/64 [1050 x 355 x 1338]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	42-15/16 x 17-3/4 x 58-5/16 [1090 x 450 x 1480]
	Unit Weight	lbs [kg]	231 [105]
	Package Weight	lbs [kg]	258 [117]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 23
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	75 , 59 / -13 , -13
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-22 / -13
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	9 , 14
	Maximum Pre-Charged Piping Length	ft [m]	100 [30]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.6
Piping	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Maximum Piping Length	ft [m]	100 [30]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15

Notes

[1]Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB
[2]Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
[3]Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB
[4]Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB. Not AHRI rated
[9]Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB
*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.
**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT ACCESSORIES: PAA-BA36NL

Condensate	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	X87-835
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Refco Condensate Pump 100-240V up to 120k BTU/h	COMBI
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	X88-721
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	SI30-230
Control Interface	Wireless Interface 2 for Comfrot app	PAC-USWHS002-WF-2
	kumo station® for Comfort app	PAC-WHS01HC-E
	IT Extender	PAC-WHS01IE-E
	Procon BACnet® and Modbus® Interface	PAC-UKPRC001-CN-1
	Operation and Error Status Output Adapter ¹	PAC-SF40RM-E
	Thermostat Interface	PAC-US446CN-1
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	TAZ-MS303W
Lineset	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	MPLS385812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	MPLS385812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	MPLS385812T-30
	3/8 x 5/8 Lineset Twin-Tube Insulation - 10 feet	MPLS385812T-10
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	MPLS385812T-100
Remote Sensor	Wireless temperature and humidity sensor for Comfort app	PAC-USWHS003-TH-1
	Wall Mount Remote Temperature Sensor	PAC-SE41TS-E
	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	PAC-USSEN002-FM-1
Terminal Signal Adapter	ERV On/Off Input Adapter for CNER on SVZ PEAD and PVA models	PAC-740
	Connector and wire for On/Off and Fan command using CN32	PAC-715AD
	Connector and wire for On/Off and Error status using CN51 and CN52	PAC-725AD
	Backup Heat Relay Kit	CN24RELAY-KIT-CM3
Wired Remote Controller	Deluxe Wired MA Remote Controller	PAR-42MAAUB
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Touch MA Remote Controller	PAR-CT01MAU-SB
	Simple MA Remote Controller	PAC-YT53CRAU-J
Wireless Remote Controller	Wireless Remote Contoller	PAR-SL101A-E
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-W
	Wireless RedLINK™ Remote Controller	MHK2
	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-E

Notes

[1]Unable to use with Wireless Handheld Remote Controller
[1]Requires MAC-334IF-E Interface to connect MA controller

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT ACCESSORIES: SUZ-AK36NLHZ

Air Outlet Guide	Air Outlet Guide 1 Piece	☐	PAC-SH96SG-E (two pieces required)
Centralized Drain Pan	Centralized Drain Pan	☐	PAC-SH97DP-E
Control/Service Tool	USB Conversion Cable for PAC-USCMS-MN-1	☐	M21EC1397
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
	ControlService Tool	☐	PAC-SK52ST
Drain Socket	Drain Socket	☐	PAC-SG61DS-E
Hail Guards	Hail Guard	☐	HG-A2
M-NET Converter	M-Net Interface for P-Series	☐	PAC-SJ95MA-E
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	16 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S164-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	16 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S164-250
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	☐	ULTRILITE2
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-5
Stand	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	Outdoor Unit Stand 12 High	☐	QSMS1202M
	18 Dual Fan Stand	☐	QSMS1802M
	24 Dual Fan Stand	☐	QSMS2402M
Terminal Signal Adapter	Connector and wire for On/Off and Error status using CN51 and CN52	☐	PAC-725AD
	Connector and wire for On/Off and Fan command using CN32	☐	PAC-715AD
Wind Baffle	Front Wind Baffle	☐	WB-PA3 (two pieces required)
Notes			

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT DIMENSIONS: PAA-BA36NL

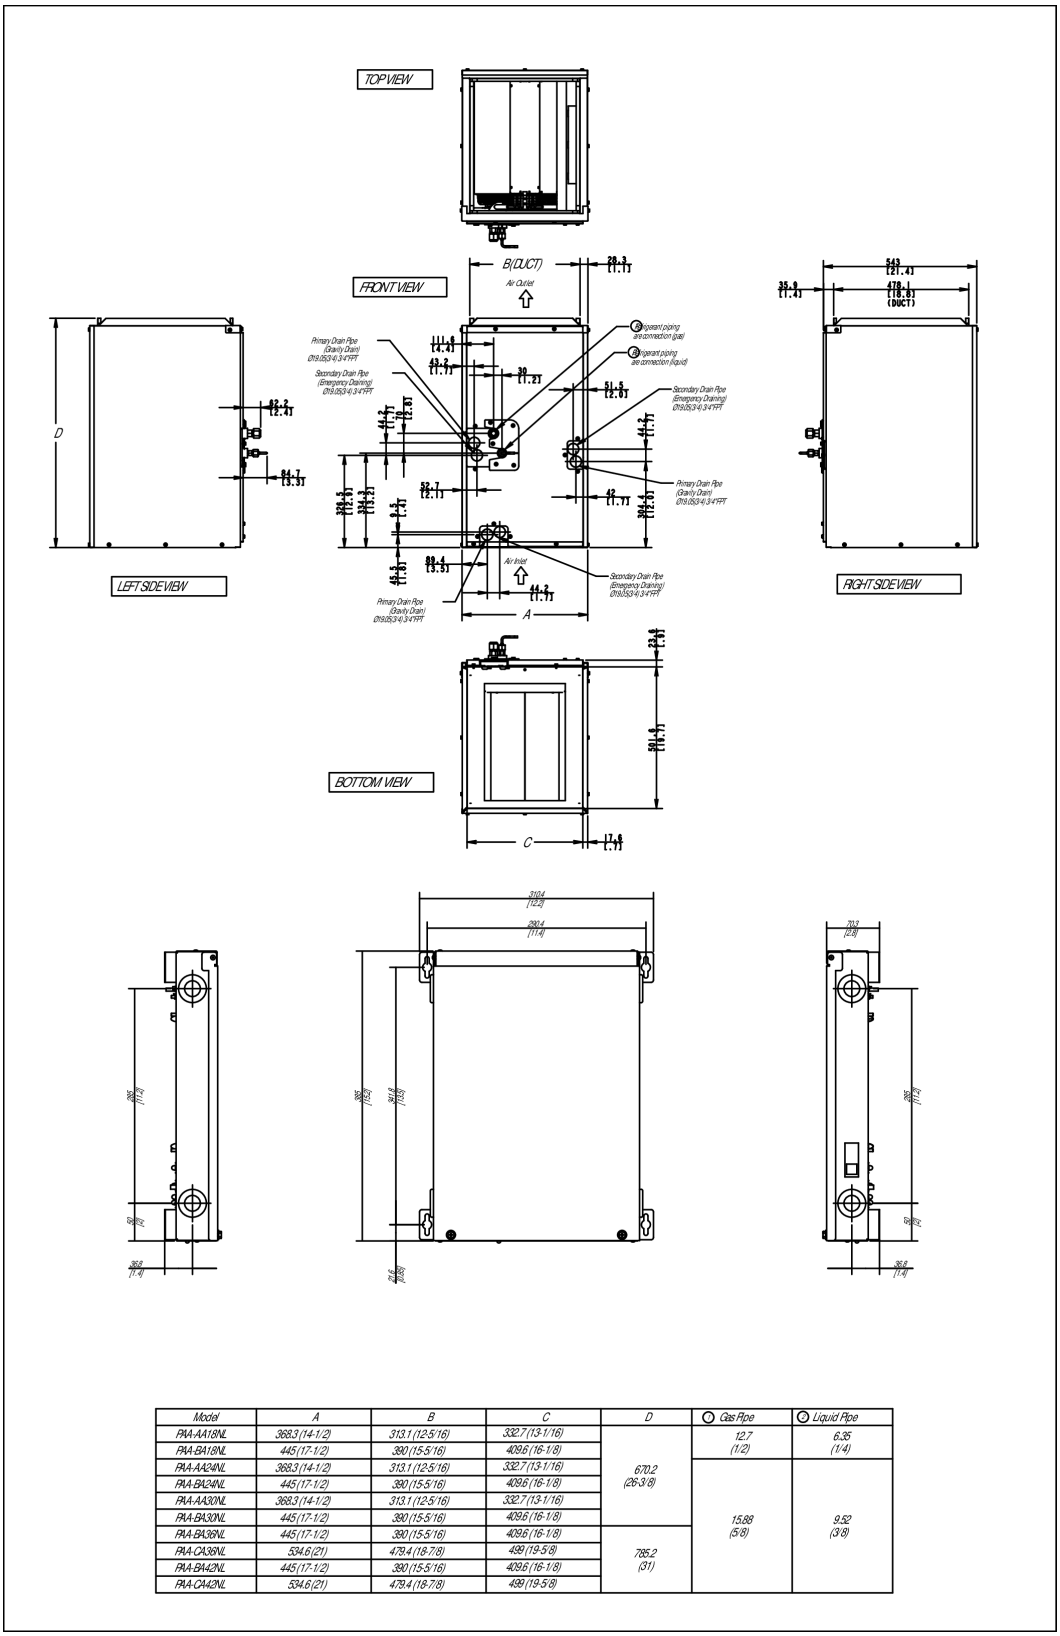

Model	A	B	C	D	ⓖ Gas Pipe	ⓛ Liquid Pipe
PAA-AA18NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)	670.2 (26-3/8)	12.7 (1/2)	6.35 (1/4)
PAA-BA18NL	445 (17-1/2)	380 (15-5/16)	409.6 (16-1/8)			
PAA-AA24NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)		15.88 (5/8)	9.52 (3/8)
PAA-BA24NL	445 (17-1/2)	380 (15-5/16)	409.6 (16-1/8)			
PAA-AA30NL	368.3 (14-1/2)	313.1 (12-5/16)	332.7 (13-1/16)			
PAA-BA30NL	445 (17-1/2)	380 (15-5/16)	409.6 (16-1/8)			
PAA-BA36NL	445 (17-1/2)	380 (15-5/16)	409.6 (16-1/8)	785.2 (31)		
PAA-CA36NL	534.6 (21)	479.4 (18-7/8)	499 (19-5/8)			
PAA-BA42NL	445 (17-1/2)	380 (15-5/16)	409.6 (16-1/8)			
PAA-CA42NL	534.6 (21)	479.4 (18-7/8)	499 (19-5/8)			

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT DIMENSIONS: SUZ-AK36NLHZ

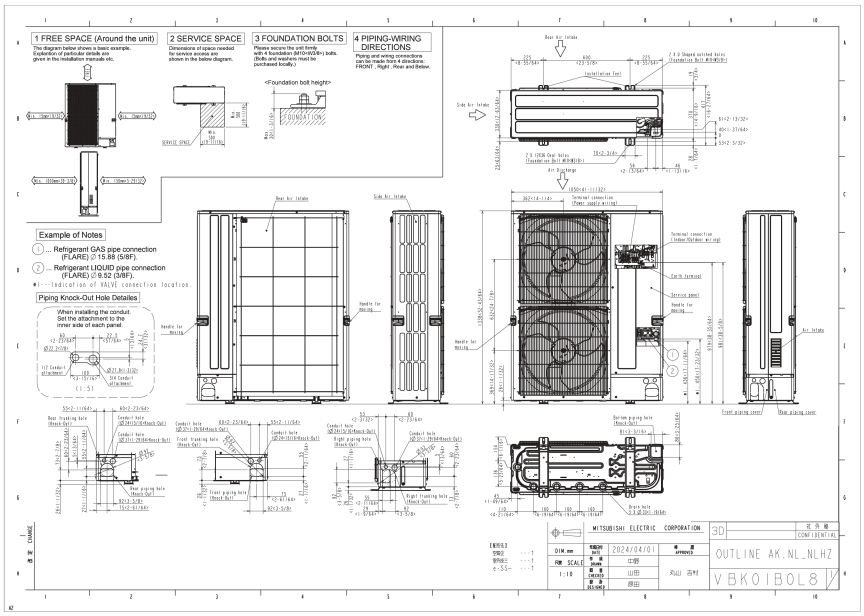

Model name

PUZ-AK36/42/48NL
PUY-AK36/42/48NL
SUZ-AK48NL
TPUZ4036I/0421/048IKALNDA
TPUY4036I/0421/048IKALNDA
NTXSK50D48LI21A
PUZ-AK24/30/36/42/48NLHZ
SUZ-AK24/30/36/48NLHZ
TPUZH0241/0301/036I/0421/048IKALNDA
NTXSK50D24/030/036/048LI21A

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-08_PROPIN

Specifications are subject to change without notice.

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.