

SEZ-AD18NL
18,000 BTU/H LOW STATIC HORIZONTAL-DUCTED INDOOR UNIT



Job Name:

System Reference:

Date:



GENERAL FEATURES


- **Condensate Lift Mechanism:** A built-in condensate lift mechanism removes water that is collected during operation and reduces the need for an additional pump to remove condensate water.
- **Three Speed Fan:** Adjust the fan between three speed settings to optimal comfort.
- **Auto Changeover:** The unit will automatically switch between heating and cooling modes to maintain your desired temperature.
- **Light Commercial:** Light commercial applications include small offices, restaurants, and retail.

SPECIFICATIONS			SYSTEM
UNIT TYPE			SEZ-AD18NL
Cooling Capacity (Nominal) ^{1,3}	Cooling Capacity (Nominal)	Btu/h	17200
Heating Capacity (Nominal) ^{2,3}	Heating Capacity (Nominal)	Btu/h	21600
Electrical	Voltage, Phase, Frequency	V AC / V AC , ø , Hz	208 / 230 , 1 , 60
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
Indoor Unit	MCA	A	1.38
	MOCP	A	15
	Fan Motor Type		DC Motor
	Fan Motor Output	W	96
	Airflow Rate at Cooling, Dry	CFM	423 , 529 , 635
	Airflow Rate at Heating, Dry	CFM	423 , 529 , 635
	Sound Pressure Level [Cooling]	dB (A)	30 , 34 , 38
	Sound Pressure Level [Heating]	dB (A)	30 , 34 , 38
	External Static Pressure	in.WG	0.02 , 0.06 , 0.14 , 0.20
	Dual Barrier Coating on Heat Exchanger		No
	Dual Barrier Coating on Fan		No
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	46-7/8 x 27-9/16 x 7-7/8 [1190 x 700 x 200]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	55-1/8 x 35-7/16 x 14-3/16 [1400 x 900 x 360]
	Unit Weight	lbs [kg]	60 [27]
	Package Weight	lbs [kg]	84 [38]
Refrigerant	Type		R454B
Piping	Liquid Pipe Size O.D.	inch [mm]	1/4 [6.35]
	Gas Pipe Size O.D.	inch [mm]	1/2 [12.7]
Indoor Unit	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]

Notes
¹Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test
²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
³Nominal capacity only. Actual capacity output varies based on the system specific configuration

INDOOR UNIT ACCESSORIES: SEZ-AD18NL

Condensate	Blue Diamond MicroBlue Condensate Pump 115-230V up to 18k BTU/h	☐ X86-003
	Blue Diamond (MaxiBlue Advanced) Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	☐ X87-711
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐ X88-721
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐ SI30-230
	Blue Diamond MultiTank collection tank for use with MegaBlue	☐ C21-014
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐ X87-835
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐ COMBI
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
Control Interface	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
	kumo station® for Comfort app	☐ PAC-WHS01HC-E
	Airzone Wired Lite Controller White	☐ AZZBSLITECB
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
	Operation and Error Status Output Adapter	☐ PAC-SF40RM-E
	Airzone Wired Lite Controller Black	☐ AZZBSLITECN
	Airzone Wireless Lite Controller White	☐ AZZBSLITERB
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	Wireless Interface 2 for Comfrot app	☐ PAC-USWHS002-WF-2
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
	IT Extender	☐ PAC-WHS01IE-E
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
Control Wire	202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel	☐ CW2042S2-100
	202PR shielded 1PR plenum wire for Airzone 500 ft reel	☐ CW2042S2-500
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - White	☐ TAZ-MS303W
	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
Filter Box	Filter Box with 1" thick pleated MERV 13 Filter	☐ FBL1-3
Lineset	1/4 x 1/2 Lineset Twin-Tube Insulation - 65 feet	☐ MLS141212T-65
	1/4 x 1/2 Lineset Twin-Tube Insulation - 100 feet	☐ MLS141212T-100
	1/4 x 1/2 Lineset Twin-Tube Insulation - 15 feet	☐ MLS141212T-15
	1/4 x 1/2 Lineset Twin-Tube Insulation - 30 feet	☐ MLS141212T-30
	1/4 x 1/2 Lineset Twin-Tube Insulation - 50 feet	☐ MLS141212T-50
N/A		☐ Unknown
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐ PAC-USSEN002-FM-1
	Wireless temperature and humidity sensor for Comfort app	☐ PAC-USWHS003-TH-1
	Wall Mounted Remote Temperature Sensor	☐ PAC-SE41TS-E
Terminal Signal Adapter	Backup Heat Relay Kit	☐ CN24RELAY-KIT-CM3
	5-Pin Wiring Harness	☐ PAC-725AD
	3-Pin Wiring Harness	☐ PAC-715AD
Wired Remote Controller	Deluxe MA Wired Remote Controller	☐ PAR-42MAAUB
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
	Simple MA Remote Controller	☐ PAC-YT53CRAU-J
	Touch MA Remote Controller	☐ PAR-CT01MAU-SB
Wireless Remote Controller	Wireless Universal Signal Receiver (for PAR-SL101A-E)	☐ PAR-SA9CA-E
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB
	Wireless RedLINK™ Remote Controller	☐ MHK2
	Universal Wireless Receiver for PAR-FL32MA-E	☐ PAR-FA32MA-W
Notes		

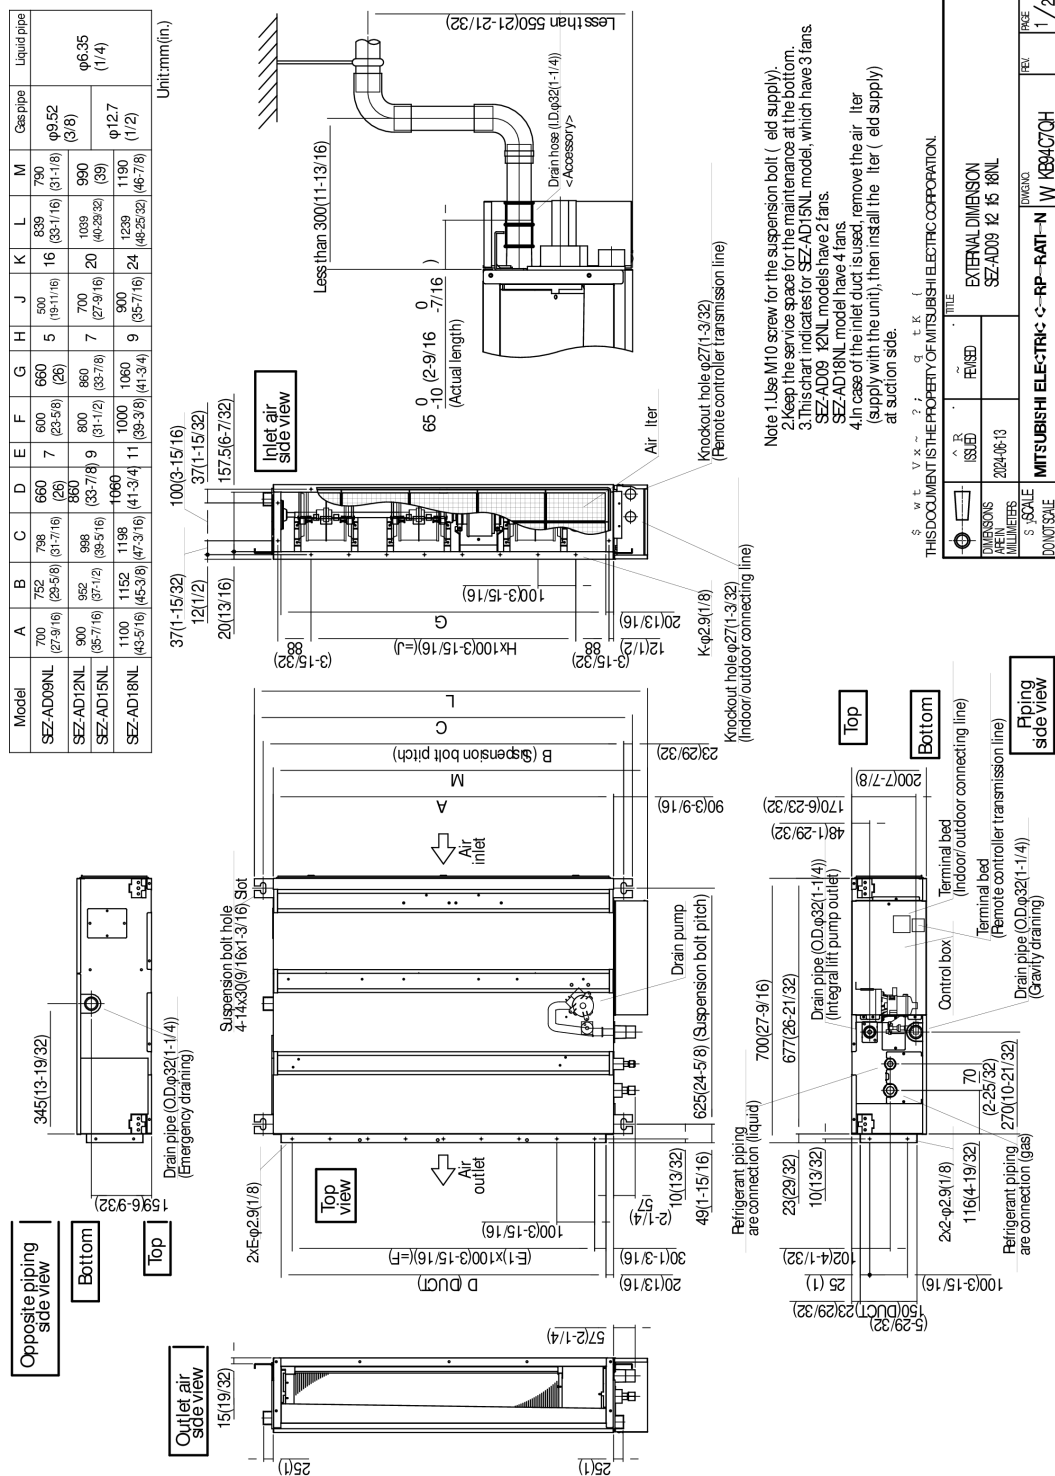

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com