


SEZ-AD18NL & SUZ-AA18NL
18,000 BTU/H LOW STATIC HORIZONTAL-DUCTED INDOOR UNIT
18,000 BTU/H HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:

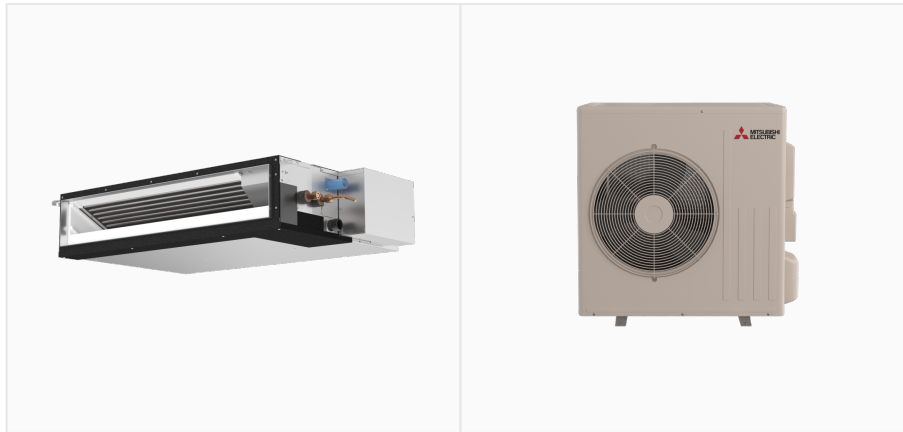

INDOOR Unit ... SEZ-AD18NL
OUTDOOR Unit ... SUZ-AA18NL

INDOOR UNIT FEATURES

- Wi-Fi Optional: A Wireless Interface Adapter can be ordered as an accessory for field installation.
- Three Speed Fan: Adjust the fan between three speed settings to optimal comfort.
- Auto Changeover: The unit will automatically switch between heating and cooling modes to maintain your desired temperature.
- Light Commercial: Light commercial applications include small offices, restaurants, and retail.
- Condensate Lift Mechanism: Reduces the need for an additional pump to remove condensate. Units with a condensate lift mechanism also include an overflow safety switch.

OUTDOOR UNIT FEATURES

- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Seacoast Protection: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.

SPECIFICATIONS: SEZ-AD18NL & SUZ-AA18NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	18000
	Rated Capacity	Btu/h	18000
	Minimum Capacity	Btu/h	5500
	Maximum Power Input	W	1400
	Rated Power Input	W	1400
	Moisture Removal	Pints/h	4
	Sensible Heat Factor		0.75
Heating at 47F ²	Power Factor [208V / 230V]	%	95 / 95
	Maximum Capacity	Btu/h	23500
	Rated Capacity	Btu/h	20000
	Minimum Capacity	Btu/h	8400
	Maximum Power Input	W	1910
	Rated Power Input	W	1510
Heating at 17F ³	Power Factor [208V / 230V]	%	95 / 95
	Maximum Capacity	Btu/h	13100
	Rated Capacity	Btu/h	13100
	Maximum Power Input	W	1240
Heating at 5F ⁵	Rated Power Input	W	1240
	Maximum Capacity	Btu/h	10500
Heating at -4F ⁶	Maximum Power Input	W	1050
	Maximum Capacity	Btu/h	8500
Efficiency	SEER2		17
	EER2 ¹		12.80
	HSPF2 [IV]		10.40
	COP at 47°F ²		3.80
	COP at 17°F at Maximum Capacity ³		3
	COP at 5°F at Maximum Capacity ⁵		2.90
	COP at -4°F at Maximum Capacity ⁶		2.66
Electrical	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	30
Indoor Unit	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	MCA	A	1.38
	Breaker Size	A	15
	Fan Motor Output	W	96
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	423 , 529 , 635
	Airflow Rate at Heating, Dry	CFM	423 , 529 , 635
	Sound Pressure Level [Cooling]	dB (A)	30 , 34 , 38
	Sound Pressure Level [Heating]	dB (A)	30 , 34 , 38
	External Static Pressure	in.WG	0.02 , 0.06 , 0.14 , 0.20
	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]
	Condensate Lift Mechanism, Max Height	inch [mm]	21-21/32 [550]
	Dual Barrier Coating on Heat Exchanger		No
	Dual Barrier Coating on Fan		No
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	46-7/8 x 27-9/16 x 7-7/8 [1190 x 700 x 200]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	55-1/8 x 35-7/16 x 14-3/16 [1400 x 900 x 360]
	Unit Weight	lbs [kg]	60 [27]
	Package Weight	lbs [kg]	84 [38]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

SPECIFICATIONS: SEZ-AD18NL & SUZ-AA18NL

Outdoor Unit	MCA	A	25
	MOCP	A	42
	Fan Motor Output	W	50
	Airflow Rate Cooling	CFM	2193
	Airflow Rate Heating	CFM	1949
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	54
	Sound Pressure Level, Heating ²	dB (A)	55
	Compressor Type		Twin Rotary
	Compressor Model		SRB172FQHMT
	Compressor Oil [Type // Charge]	// oz	RM68EH // 14.5
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Optional
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 13 x 34-5/8 [840 x 330 x 880]
ODU Operating Temp. Range	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-5/8 x 16-9/16 x 39 [980 x 420 x 990]
	Unit Weight	lbs [kg]	115 [52.16]
	Package Weight	lbs [kg]	133 [60.33]
	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
Refrigerant	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	75 , 65 / -4 , -5
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-14 / -4
	Type		R454B
Piping	Pre-Charged Refrigerant Amount	lbs	3
	Maximum Pre-Charged Piping Length	ft [m]	25 [7.6]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.22
	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	1/2 [12.7]
	Maximum Piping Length	ft [m]	100 [30]
	Maximum Height Difference	ft [m]	50 [15]
Notes ¹ Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB ² Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB ³ Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB ⁵ Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB *Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions. **Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures. ⁶ Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB			

INDOOR UNIT ACCESSORIES: SEZ-AD18NL

Condensate	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐ X87-835
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐ X87-711
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐ SI30-230
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐ COMBI
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	☐ X86-003
	Blue Diamond MultiTank collection tank for use with MegaBlue	☐ C21-014
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐ X88-721
Control Interface	Wireless Interface 2 for Comfrot app	☐ PAC-USWHS002-WF-2
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	Operation and Error Status Output Adapter	☐ PAC-SF40RM-E
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
	Airzone Wired Lite Controller White	☐ AZZBSLITECB
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
	Airzone Wired Lite Controller Black	☐ AZZBSLITECN
	Airzone Wireless Lite Controller White	☐ AZZBSLITERB
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
	kumo station® for Comfort app	☐ PAC-WHS01HC-E
	IT Extender	☐ PAC-WHS01IE-E
	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
Control Wire	202PR 1PR shielded 1PR plenum wire for Airzone 100 ft reel	☐ CW2042S2-100
	202PR shielded 1PR plenum wire for Airzone 500 ft reel	☐ CW2042S2-500
Disconnect Switch	30A600VUL fits 2 X 4 utility box - White	☐ TAZ-MS303W
	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
Filter Box	Filter Box with 1" thick pleated MERV 13 Filter	☐ FBL1-3
Lineset	1/4 x 1/2 Lineset Twin-Tube Insulation - 50 feet	☐ MLS141212T-50
	1/4 x 1/2 Lineset Twin-Tube Insulation - 15 feet	☐ MLS141212T-15
	1/4 x 1/2 Lineset Twin-Tube Insulation - 30 feet	☐ MLS141212T-30
	1/4 x 1/2 Lineset Twin-Tube Insulation - 65 feet	☐ MLS141212T-65
	1/4 x 1/2 Lineset Twin-Tube Insulation - 100 feet	☐ MLS141212T-100
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐ PAC-USSEN002-FM-1
	Wall Mount Remote Temperature Sensor	☐ PAC-SE41TS-E
	Wireless temperature and humidity sensor for Comfort app	☐ PAC-USWHS003-TH-1
Terminal Signal Adapter	Connector and wire for On/Off and Error status using CN51 and CN52	☐ PAC-725AD
	Backup Heat Relay Kit	☐ CN24RELAY-KIT-CM3
	Connector and wire for On/Off and Fan command using CN32	☐ PAC-715AD
Wired Remote Controller	Touch MA Remote Controller	☐ PAR-CT01MAU-SB
	Simple MA Remote Controller	☐ PAC-YT53CRAU-J
	Deluxe Wired MA Remote Controller	☐ PAR-42MAAUB
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
Wireless Remote Controller	Wireless RedLINK™ Remote Controller	☐ MHK2
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB
	Universal Wireless Receiver for PAR-FL32MA-E	☐ PAR-FA32MA-W
	Wireless Universal Signal Receiver (for PAR-SL101A-E)	☐ PAR-SA9CA-E
Notes ¹ Requires MAC-3341F-E Interface to connect MA controller ¹ Unable to use with Wireless Handheld Remote Controller		


OUTDOOR UNIT ACCESSORIES: SUZ-AA18NL

Air Outlet Guide	Air Outlet Guide	☐	MAC-890SG-E
Control/Service Tool	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
Drain Socket	Drain Socket	☐	MAC-871DS
Hail Guards	Hail Guard	☐	HG-A7
Mini-Split Wire	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	☐	ULTRILITE1
Muffler	Muffler	☐	MAC-002MF-E
Optional Defrost Heater	Base Heater	☐	MAC-660BH-U
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-3
Stand	Condenser Wall Bracket	☐	QSWB2000M-1
	24 Single Fan Stand	☐	QSMS2401M
	Outdoor Unit Stand 12 High	☐	QSMS1201M
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	18 Single Fan Stand	☐	QSMS1801M
Notes			

INDOOR UNIT DIMENSIONS: SEZ-AD18NL

Model	A	B	C	D	E	F	G	H	J	K	L	M	Gas pipe	Liquid pipe
SEZ-AD09NL	700 (27-39)	752 (23-58)	798 (31-71)	860 (26)	900 (27)	938 (23-58)	980 (26)	1060 (33-78)	1100 (31-11)	1152 (33-16)	1198 (33-16)	1239 (33-16)	ø9.52 (3/8)	
SEZ-AD12NL	900 (35-71)	952 (31-72)	998 (39-51)	1060 (29)	1100 (31-78)	1152 (33-78)	1198 (33-78)	1239 (33-78)	1277 (33-78)	1323 (33-78)	1369 (33-78)	1415 (33-78)	ø12.7 (1/2)	
SEZ-AD15NL	1100 (43-57)	1152 (45-38)	1198 (47-31)	1260 (41-34)	1300 (41-34)	1352 (43-38)	1400 (43-38)	1460 (43-38)	1500 (43-38)	1552 (43-38)	1600 (43-38)	1648 (43-38)	ø12.7 (1/2)	
SEZ-AD18NL	1300 (50-71)	1352 (52-52)	1400 (54-45)	1460 (48-41)	1500 (48-41)	1552 (50-71)	1600 (50-71)	1660 (50-71)	1700 (50-71)	1752 (50-71)	1800 (50-71)	1848 (50-71)	ø12.7 (1/2)	

Unit:mm(in.)

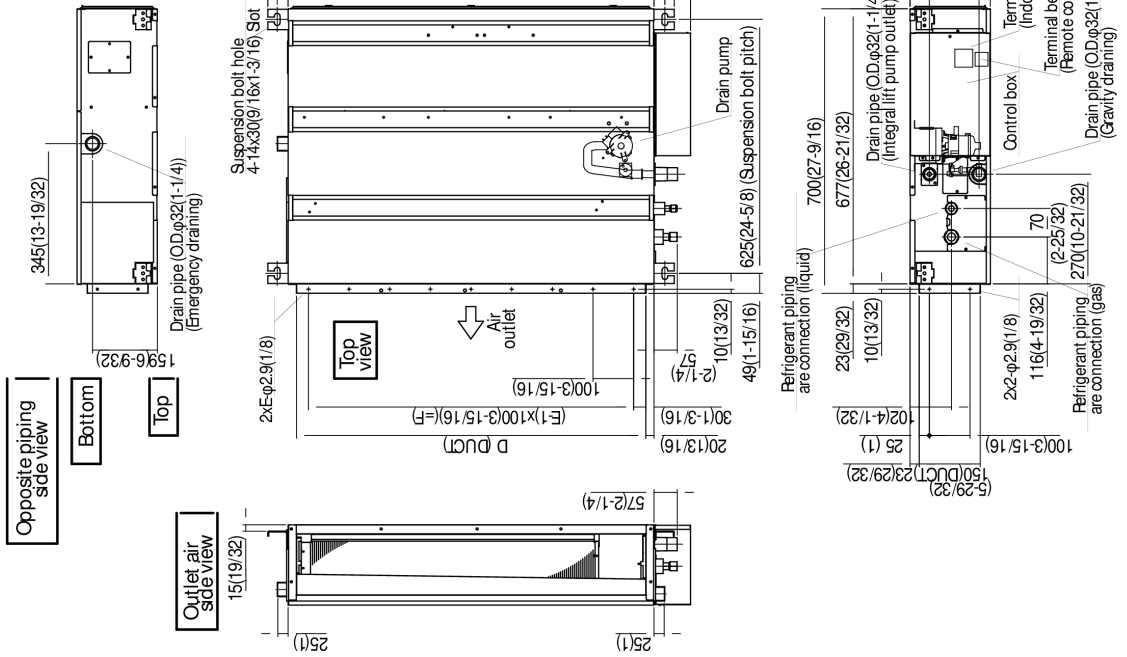


Note 1 Use M10 screw for the suspension bolt (sold supply).
2 Keep the service space for the maintenance at the bottom.
3 This chart indicates for SEZ-AD15NL model, which have 3 fans.
SEZ-AD09 12NL models have 2 fans.
SEZ-AD18NL model have 4 fans.
4 In case of the inlet duct is used, remove the air filter (supply with the unit), then install the filter (sold supply) at suction side.

\$ w t V x ~ ? ; q t K {

	ISSUED	REVISED	TITLE		
DIMENSIONS 1/4" IN 1/8" IN 1/16" IN 1/32" IN 1/64" IN 1/128" IN 1/256" IN 1/512" IN 1/1024" IN 1/2048" IN 1/4096" IN 1/8192" IN 1/16384" IN 1/32768" IN 1/65536" IN 1/131072" IN 1/262144" IN 1/524288" IN 1/1048576" IN 1/2097152" IN 1/4194304" IN 1/8388608" IN 1/16777216" IN 1/33554432" IN 1/67108864" IN 1/134217728" IN 1/268435456" IN 1/536870912" IN 1/1073741824" IN 1/2147483648" IN 1/4294967296" IN 1/8589934592" IN 1/17179869184" IN 1/34359738368" IN 1/68719476736" IN 1/137438953472" IN 1/274877906944" IN 1/549755813888" IN 1/1099511627776" IN 1/2199023255552" IN 1/4398046511104" IN 1/8796093022208" IN 1/17592186044416" IN 1/35184372088832" IN 1/70368744177664" IN 1/140737488355328" IN 1/281474976710656" IN 1/562949953421312" IN 1/1125899906842624" IN 1/2251799813685248" IN 1/4503599627370496" IN 1/9007199254740992" IN 1/18014398509481984" IN 1/36028797018963968" IN 1/72057594037927936" IN 1/144115188075855872" IN 1/288230376151711744" IN 1/576460752303423488" IN 1/1152921504606846976" IN 1/2305843009213693952" IN 1/4611686018427387904" IN 1/9223372036854775808" IN 1/18446744073709551616" IN 1/36893488147419103232" IN 1/73786976294838206464" IN 1/147573952589676412928" IN 1/295147905179352825856" IN 1/590295810358705651712" IN 1/1180591620717411303424" IN 1/2361183241434822606848" IN 1/4722366482869645213696" IN 1/9444732965739290427392" IN 1/18889465931478580854784" IN 1/37778931862957161709568" IN 1/75557863725914323419136" IN 1/151115727451828646838272" IN 1/302231454903657293676544" IN 1/604462909807314587353088" IN 1/1208925819614629174706176" IN 1/2417851639229258349412352" IN 1/4835703278458516698824704" IN 1/9671406556917033397649408" IN 1/19342813113834066795298816" IN 1/38685626227668133590597632" IN 1/77371252455336267181195264" IN 1/154742504910672534362390528" IN 1/309485009821345068724781056" IN 1/618970019642690137449562112" IN 1/1237940039285380274899124224" IN 1/2475880078570760549798248448" IN 1/4951760157141521099596496896" IN 1/9903520314283042199192993792" IN 1/19807040628566084398385987584" IN 1/39614081257132168796771975168" IN 1/79228162514264337593543950336" IN 1/158456325028528675187087900672" IN 1/316912650057057350374175801344" IN 1/633825300114114700748351602688" IN 1/1267650600228229401496703205376" IN 1/2535301200456458802993406410752" IN 1/5070602400912917605986812821504" IN 1/10141204801825835211973625643008" IN 1/20282409603651670423947251286016" IN 1/40564819207303340847894502572032" IN 1/81129638414606681695789005144064" IN 1/162259276829213363391578010288128" IN 1/324518553658426726783156020576256" IN 1/649037107316853453566312041152512" IN 1/1298074214633706907132624082305024" IN 1/2596148429267413814265248164610048" IN 1/5192296858534827628530496329220096" IN 1/10384593717069655257060992658440192" IN 1/20769187434139310514121985316880384" IN 1/41538374868278621028243970633760768" IN 1/83076749736557242056487941267521536" IN 1/166153499473114484112975882535043072" IN 1/332306998946228968225951765070086144" IN 1/664613997892457936451903530140172288" IN 1/1329227995784915872903807060280344576" IN 1/26584559915698317458076141205606891536" IN 1/53169119831396634916152282411213783072" IN 1/10633823966279326983230456482242756608" IN 1/21267647932558653966460912964485513216" IN 1/42535295865117307932921825928971026432" IN 1/85070591730234615865843651857942052864" IN 1/170141183460469231731687303715884105728" IN 1/340282366920938463463374607431768211456" IN 1/680564733841876926926749214863536422912" IN 1/1361129467683753853853498429727072845824" IN 1/2722258935367507707706996859454145691536" IN 1/5444517870735015415413993718908291383072" IN 1/10889035741470030830827987437816582766144" IN 1/21778071482940061661655974875633165532288" IN 1/4355614296588012332331194			2024-06-13	EXTERNAL DIMENSION SEZ-AD09 12 15 18NL	
S SCALE			DWG NO		
MITSUBISHI ELECTRIC C-RP-RATI-N			W K894C7QH		
DO NOT SCALE			PAGE 1/2		

OUTDOOR UNIT DIMENSIONS: SUZ-AA18NL

REQUIRED SPACE

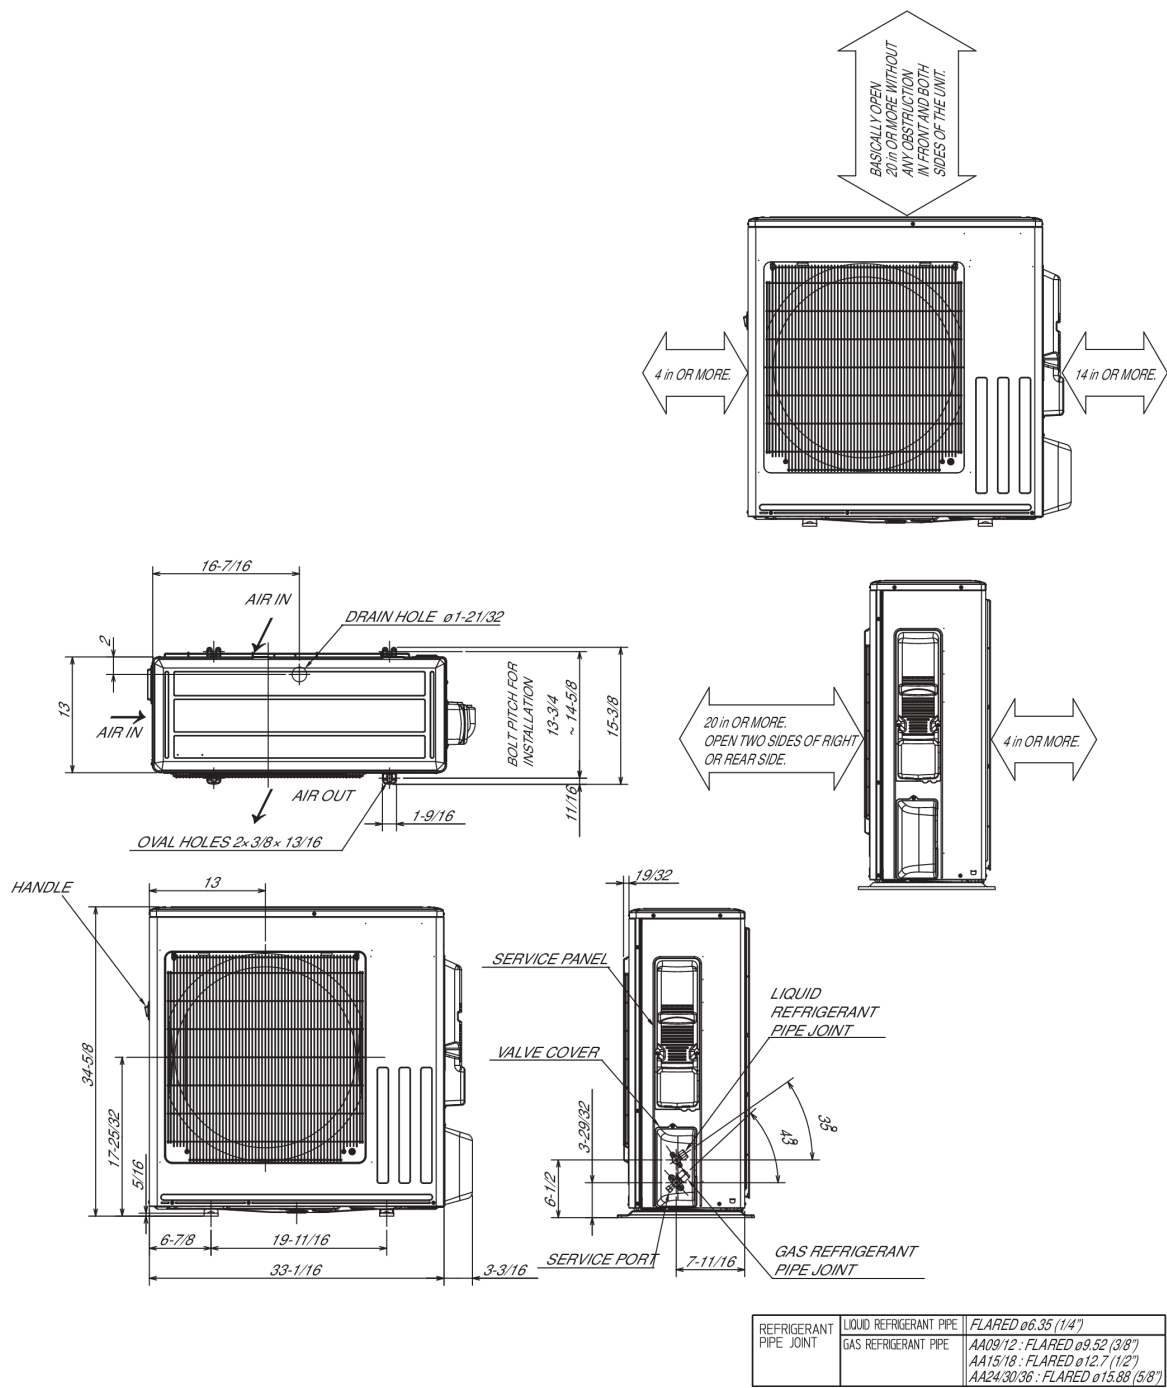

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-08_PROPIN

