32" UNBLOCKABLE CHANNEL MAIN DRAINS

IMPROVED HEAVY DUTY DESIGN

Heavy Duty Unblockable VGBA Safety Drain Design

PRODUCT FEATURES

- **IMPROVED** Strength & Durability
- Integrated Water Stop Design Prevents
- Plaster Separation & Retains Drain Shape
- Body Shape Reinforcing Ribs
- Finishing Plugs for Unused Screws
- Black Drains Include Matching Black Sump
- Covers Completely Hide the White Sump
- Color Covers Will Retrofit Competing Channel Drains
- Installation Debris Guard Included
- IAPMO Listed VGBA Suction: Compliant to ANSI/ APSP - 16 2017 & CPSC Requirements

TECHNICAL GUIDE

- Single or Multiple Drain Use
- Seven Year Life on Cover
- Floor or Wall Installation
- IAPMO Listed
- 38.79in^2 Open Area
- Three 2" Socket × 2.5" Spigot Ports
- PVC Sump Body

IAPMO LISTED FLOW RATES			
PLUMBING	PORTS	FLOOR FLOW RATE	WALL FLOW RATE
2.5"	OUTER	298 GPM	212 GPM
2.5"	CENTER	200 GPM	168 GPM
2"	OUTER	242 GPM	192 GPM
2"	CENTER	184 GPM	168 GPM
FLOW RATE VERIFIED MAY 2011 TO CPSC TEST PROTOCOL			



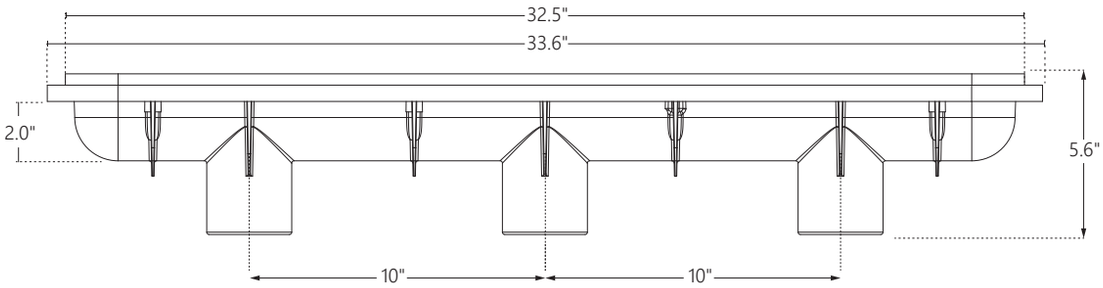

ORDERING GUIDE

32" VGBA UNBLOCKABLE CHANNEL MAIN DRAIN & ACCESSORIES							
WHITE	GRAY	BLACK	DARK GRAY	TAN	DARK BLUE*	DESCRIPTION	BOX QTY
25506-320-000	25506-321-000	25506-324-000	25506-327-000	25506-329-000	25506-369-000	COMPLETE DRAIN & SUMP	40
25506-320-800	25506-321-800	25506-324-800	25506-327-800	25506-329-800	25506-369-800	32" COVER ONLY WITH SCREWS	20
25506-320-900	25506-321-900	25506-324-900	—	—	—	32" BODY ONLY	1
25506-320-100	25506-321-100	25506-324-100	25506-327-100	25506-329-100	25506-369-100	COVER & FRAME (NO SUMP)	1
25506-320-150	—	—	—	—	—	ADJUSTABLE COLLAR ADAPTER	1
25620-320-000	—	—	—	—	—	2" HYDROSTATIC RELIEF VALVE	250
25520-050-020	—	—	—	—	—	2" NPT PLUG	450
25506-320-030	—	—	—	—	—	INSTALLATION DEBRIS GUARD	1

CMP everything matters.

POOL | SPA | BATH
CS@c-m-p.com | www.c-m-p.com

©2021 CMP 10000-300-312 1221ab