

Jandy®

A COMPACT HIGH-PERFORMANCE HEATER

OFFICIAL POOL EQUIPMENT SUPPLIER

USA SWIMMING

JXi™

POOL & SPA HEATER

The JXi offers a Space-Saving and Energy-Efficient Design that's Easy to Install

The JXi™ heater sets the standard in pool and spa heating technology with its ultra-compact size, lightweight design, durable construction and high energy-efficiency rating. Providing extreme installation flexibility, this high-efficiency, low-NO_x heater is a top choice for pool professionals and pool owners everywhere and is available in both natural and propane gas models.

Best Retrofit Option

3-port header for easy plumbing and quick replacement of MasterTemp® and Max-E-Therm® heaters with no plumbing adjustments



Major competitor model*



Ultra-Compact Lightweight Design

Fits on a 2' x 2' pad and is 38% lighter with a 28% smaller footprint*

*Compared to major competitor models.

Flexible Installation


Top is easily removed for increased accessibility and rotated 180 degrees so you never need to rotate headers



Additional Features

- **Simple Servicing**
  Flip up electrical panel for convenient access during service visits
- **Keeps Critters Out**
  Fully encased shell protects against rodent intrusion and damage
- **Versa Plumb®-Ready**
  Installation in the Versa Plumb system reduces plumbing costs and increases hydraulic efficiency, all using the smallest footprint available

DIMENSIONS

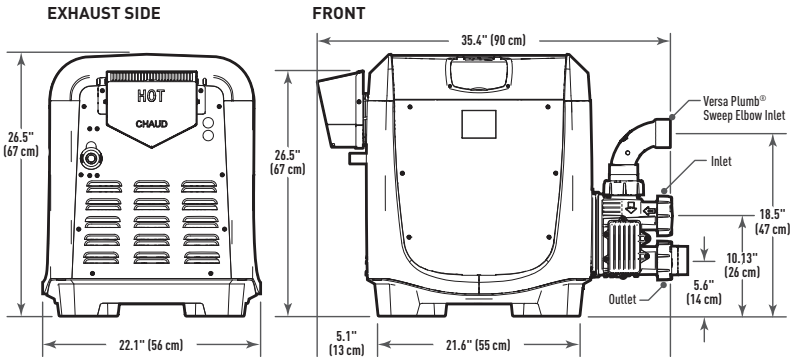

AVAILABLE MODELS

Model No.	Firing Rate	Gas Type	Heat Exchanger	Thermal Efficiency	Weight	Vent Diameter*	Min. GPM	Max. GPM
JXi200N	200K BTU	Natural Gas	Copper	83%	117 lbs.	6" (15 cm)	30	100
JXi260N	260K BTU	Natural Gas	Copper	84%	120 lbs.	7" (18 cm)	30	100
JXi400N	399K BTU	Natural Gas	Copper	84%	126 lbs.	8" (20 cm)	30	100
JXi400NN	399K BTU	Natural Gas	Cupronickel	83%	126 lbs.	8" (20 cm)	30	100
JXi200P	200K BTU	Propane	Copper	83%	117 lbs.	6" (15 cm)	30	100
JXi260P	260K BTU	Propane	Copper	84%	120 lbs.	7" (18 cm)	30	100
JXi400P	399K BTU	Propane	Copper	84%	126 lbs.	8" (20 cm)	30	100
JXi400PN	399K BTU	Propane	Cupronickel	83%	126 lbs.	8" (20 cm)	30	100
JXiVFKIT	JXi VersaFlo Accessory Kit (Not compatible with ASME® compliant heaters)							

*For Category 1 vertical venting

PRO SPECS

- Available in three BTU sizes, 200K, 260K, 399K, and offered in both natural and propane gas models.
- Models available with CuNi Heat Exchangers
- Lightweight, compact design, weighs less than 126 pounds unpackaged, for easy maneuverability and transport
- Best retrofit option, no plumbing adjustments required for quick and easy replacement of MasterTemp® and Max-E-Therm® heaters
- Weld-free combustion chamber for optimal corrosion resistance, models available with copper or cupronickel heat exchangers.
- Venturi-driven air and gas mix for enhanced performance.
- Reliable, balanced flow and temperature control with thermal regulator valve.
- Differentiated limit switches meet applicable product safety standards.
- Corrosion-resistant temperature sensors for reliable operation.

3rd party efficiency testing reports per Federal DOE test requirements.

TRADE SERIES EXCLUSIVE

©2024 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 70233_SL

70233_SL